

MATHEMATISCHES FORSCHUNGSINSTITUT OBERWOLFACH

Report No. 55/2012

DOI: 10.4171/OWR/2012/55

## Mini-Workshop: Efficient and Robust Approximation of the Helmholtz Equation

Organised by  
Markus Melenk, Wien  
Peter Monk, Delaware  
Christian Wieners, Karlsruhe

25 November – 1 December 2012

ABSTRACT. The accurate and efficient treatment of wave propagation phenomena is still a challenging problem. A prototypical equation is the Helmholtz equation at high wavenumbers. For this equation, Babuška & Sauter showed in 2000 in their seminal SIAM Review paper that standard discretizations must fail in the sense that the ratio of true error and best approximation error has to grow with the frequency. This has spurred the development of alternative, non-standard discretization techniques. This workshop focused on evaluating and comparing these different approaches also with a view to their applicability to more general wave propagation problems.

*Mathematics Subject Classification (2000):* 65N30,65N12,65N38.

### Introduction by the Organisers

The non-standard methods that could overcome the limitations of standard finite difference or finite element methods in the high-frequency regime include

- high order methods;
- Galerkin methods with special ansatz functions (e.g. plane waves);
- Petrov-Galerkin methods with wave-dependent test functions;
- boundary elements with a suitable compression of the integral operator.

Representatives of these methods were discussed at the workshop. In the time-harmonic setting, several talks covered questions of stability, both on the continuous level and of numerical schemes, with the particular emphasis of making the wavenumber-dependence explicit. The topic of *a posteriori* error estimating and,

more generally, adaptivity for this problem class was addressed in several contributions. The iterative solution of the large systems of equations for Helmholtz and Maxwell systems is particularly delicate and therefore the topic of two talks. Since the underlying physical problem is often posed in unbounded domains, several presentations were devoted to questions of coupling different discretizations, to boundary element methods, and to “infinite elements”. Also, recent progress on some time-domain formulations such as convolution quadrature techniques was presented.

#### REFERENCES

- [1] I. BABUSKA AND S. SAUTER, *Is the pollution effect of the FEM avoidable for the Helmholtz equation considering high wavenumbers?*, SIAM Review, 42 (2000), pp. 451–484.
- [2] L. DEMKOWICZ, J. GOPALAKRISHNAN, I. MUGA, AND J. ZITELLI, *Wavenumber explicit analysis for a DPG method for the multidimensional Helmholtz equation*, Computer Methods in Applied Mechanics and Engineering, 213:126–138, 2012.
- [3] W. DÖRFLER, *Robust discretisation and a posteriori control for strongly oscillating solutions of the Schrödinger equation*, Comput. Methods Appl. Math., 11(4):418–440, 2011
- [4] B. ENGQUIST AND L. YING, *Sweeping preconditioner for the Helmholtz equation: Hierarchical matrix representation*, Commun. Pure Appl. Math. 64(5):697–735, 2011.
- [5] R. HIPTMAIR, A. MOIOLA, AND I. PERUGIA, *Plane wave discontinuous Galerkin methods for the 2d Helmholtz equation: Analysis of the  $p$ -version*, SIAM J. Numer. Anal., 49 (2011), pp. 264–284.
- [6] J. M. MELENK AND S. SAUTER, *Convergence analysis for finite element discretizations of the Helmholtz equation with Dirichlet-to-Neumann boundary conditions*, Math. Comp., 79 (2010), pp. 1871–1914.
- [7] ———, *Wavenumber explicit convergence analysis for Galerkin discretizations of the Helmholtz equation*, SIAM J. Numer. Anal., 49 (2011), pp. 1210–1243.
- [8] L. YING, *Sparse Fourier transform via butterfly algorithm*, SIAM J. Sci. Comp., 31 (2009), pp. 1678–1694.

**Mini-Workshop: Efficient and Robust Approximation of the Helmholtz Equation****Table of Contents**

Lehel Banjai (joint with V. Gruhne, Ch. Lubich, F. J. Sayas) <i>FEM/BEM coupling for acoustics in the time-domain</i> . . . . .	3309
Leszek Demkowicz (joint with J. Gopalakrishnan, M. Melenk, I. Muga, D. Pardo) <i>DPG Method as a Non-conforming Discretization Scheme</i> . . . . .	3309
Willy Dörfler (joint with S. Sauter) <i>A posteriori error estimation for highly indefinite Helmholtz problems</i> . .	3312
Martin Jakob Gander <i>Iterative Methods for Helmholtz and Maxwell Equations</i> . . . . .	3314
Ivan G. Graham (joint with P. Childs, M. Gander, E. Spence and D. Shanks) <i>On shifted Laplace and related preconditioners for finite element approximations of the Helmholtz equation</i> . . . . .	3316
Ralf Hiptmair (joint with C. Jerez-Hanckes and Ch. Schwab) <i>Sparse Tensor Edge Elements</i> . . . . .	3318
Mark Lyon <i>Fourier continuation methods</i> . . . . .	3321
Jens M. Melenk (joint with M. Faustmann, D. Praetorius) <i>H-matrix approximability of the inverses of first kind BEM matrices</i> . . .	3322
Lothar Nannen (joint with M. Halla, T. Hohage, J. Schöberl) <i>Hardy space method for waveguides</i> . . . . .	3325
Stefan A. Sauter (joint with M. Lopez-Fernandez) <i>Generalized Convolution Quadrature for Hyperbolic Integral Equation</i> . .	3328
Euan A. Spence (joint with A. Moiola) <i>Is the Helmholtz equation really sign indefinite?</i> . . . . .	3331
Christian Wieners (joint with B. Wohlmuth) <i>Robust operator estimates</i> . . . . .	3334



## Abstracts

### FEM/BEM coupling for acoustics in the time-domain

LEHEL BANJAI

(joint work with V. Gruhne, Ch. Lubich, F. J. Sayas)

In this talk we have discussed the numerical simulation of acoustic wave propagation with localized inhomogeneities. A standard Galerkin finite element method (FEM) in space and leapfrog time-stepping in time was applied on a finite spatial domain containing the inhomogeneities. The equations in the exterior computational domain were dealt with by a time-domain boundary integral (TDBIE) formulation discretized by the Galerkin boundary element method (BEM) in space and convolution quadrature [1] in time.

We have given a stability analysis of the proposed method, starting with the proof of a positivity preservation property of convolution quadrature as a consequence of a variant of the Herglotz theorem. Combining this result with standard energy analysis of the leapfrog discretization of interior equations gives the stability of the method. This is a work in progress and two formulations have been described. For one a complete stability and convergence analysis is available, whereas for the other the analysis is not complete but we have presented some numerical results showing stability in practice. Related work, but for Galerkin discretization of TDBIE, can be found in [2].

#### REFERENCES

- [1] *On the Multistep Time Discretization of Linear Initial-Boundary Value Problems and Their Boundary Integral Equations* Numer. Math. **67** (1994), 365–389.
- [2] T. Abboud, P. Joly, J. Rodriguez, I. Terrasse, *Coupling discontinuous Galerkin methods and retarded potentials for transient wave propagation on unbounded domains* J. Comput. Phys. **230** (2011), 5877–5907.

### DPG Method as a Non-conforming Discretization Scheme

LESZEK DEMKOWICZ

(joint work with J. Gopalakrishnan, M. Melenk, I. Muga, D. Pardo)

This is a “work in progress” report on our attempt to understand the pollution-free behavior of the Discontinuous Petrov Galerkin (DPG) method for linear acoustics equations. Let  $\Omega \subset \mathbb{R}^2$  be a domain satisfying Melenk’s regularity assumptions [1]. We wish to solve the model linear acoustics problem:

$$(1) \quad \begin{cases} i\omega u + \nabla p & = g & \text{in } \Omega \\ i\omega p + \operatorname{div} u & = f & \text{in } \Omega \\ p - u_n & = 0 & \text{on } \Gamma = \partial\Omega . \end{cases}$$

Here  $p$  is the pressure,  $u$  acoustic velocity,  $\omega$  the angular velocity and  $u_n = u \cdot n$  stands for the normal component of velocity with  $n$  denoting the outward normal unit vector. The DPG method is based on a mesh-dependent ultraweak variational formulation:

$$(2) \quad \left\{ \begin{array}{l} (u, p) \in (L^2(\Omega))^2 \times L^2(\Omega), (\hat{u}_n, \hat{p}) \in H^{-1/2}(\Gamma_h^0) \times H^{1/2}(\Gamma_h^0) \\ \underbrace{((u, p), A_h(v, q)) + \langle \hat{u}_n, q \rangle + \langle \hat{p}, v_n \rangle}_{=: b((u, p, \hat{u}_n, \hat{p}), (v, q))} = (g, v) + (f, q) \\ \forall (v, q) \in H(\text{div}, \Omega_h) \times H^1(\Omega_h), q = -v_n \text{ on } \Gamma. \end{array} \right.$$

Here  $A(u, p)$  denotes the first order differential operator corresponding to system (1), index  $h$  in  $A_h(v, q)$  indicates that the operator is applied element-wise to discontinuous test functions coming from the broken test space  $H(\text{div}, \Omega_h) \times H^1(\Omega_h)$ ,  $(\cdot, \cdot)$  stands for  $L^2(\Omega)$  inner product and  $\langle \cdot, \cdot \rangle$  for the conjugated duality pairing on the mesh skeleton -  $H^{-1/2}(\Gamma_h) \times H^{1/2}(\Gamma_h)$  or  $H^{1/2}(\Gamma_h) \times H^{-1/2}(\Gamma_h)$ .

It has been proved in [4] that, if we equip the traces and fluxes with the minimum energy extension norm corresponding to the graph norm,

$$(3) \quad \|(\hat{u}_n, \hat{p})\|_E^2 := \inf\{\|u, p\|^2 + \|A(u, p)\|^2 : (\hat{u}_n, \hat{p}) = (u, p)|_{\Gamma_h}, u_n = p \text{ on } \Gamma\}$$

and use the (broken) graph norm for the test space, then the inf-sup constant corresponding to the sesquilinear form  $b((u, p, \hat{u}_n, \hat{p}), (v, q))$  is independent of both the mesh and frequency  $\omega$ . This implies that the DPG method with optimal test functions is *uniformly stable* in frequency  $\omega$ .

This, unfortunately, does not make it *pollution free* in the engineering sense. A pollution free method is expected to deliver the same relative  $L^2$ -error as long as we use the same resolution of wavelength - a fixed number of elements of a specific, fixed order, per wavelength. The stability estimate for the DPG method:

$$(4) \quad \begin{aligned} & \| (u - u_h, p - p_h) \| + \| (\hat{u}_n - \hat{u}_{n,h}, \hat{p} - \hat{p}_h) \|_E \\ & \leq C \inf_{(w_h, r_h, \hat{w}_n, \hat{r})} \{ \| (u - w_h, p - r_h) \| + \| (\hat{u}_n - \hat{w}_{n,h}, \hat{p} - \hat{r}_h) \|_E \} \end{aligned}$$

implies such a result in 1D only (proved in [3] in a different way). In 1D, traces and fluxes are just numbers so the best approximation of those is always zero and the best approximation error on the right-hand side of (4) reduces to the  $L^2$  best approximation error only. And  $L^2$ - projection error is indeed pollution free. In the multidimensional case, however, the minimum energy extension norm hides derivatives ( $H^1$ - and  $H(\text{div})$ -like norms) which do exhibit pollution. This can be intuitively seen from differentiating a plane wave solution  $e^{i\omega x}$ . The best approximation error in  $H^1$ -norm would always be of order  $\omega(\omega h)^r$ , always one power of  $\omega$  too much.

The existing convergence analysis indicates thus that, in multidimensions, the DPG method exhibits the same pollution as classical Bubnov-Galerkin scheme.

This does not explain the almost pollution free behavior of the DPG method observed numerically [4]. One perhaps should be more careful with this statement. In a typical 2D experiment with plane waves, if we compare second order DPG method (four quadratic elements per wavelength to approximate fluxes and traces)

with any other second order method, the DPG method is practically pollution free (experiments with up to 250 wavelengths per domain). On a closer look though, if we count degrees of freedom, the four quadratic DPG elements per wavelength should be compared with four *quintic* standard finite elements. And, with four quintic elements per wave length, the standard Bubnov-Galerkin method delivers pollution-free results as well.

So, are there some higher order, “superconvergence” effects working behind the scenes for the quadratic DPG method ?

**A global interpretation of the DPG method..** In practice, the DPG method requires an approximate inverse of the Riesz operator, In *practical DPG method* approximate optimal test functions are obtained by using Bubnov-Galerkin and locally enriched spaces of order  $p + \Delta p$  where  $p$  is the order of trial shape functions. In practically all computed examples, we have used  $\Delta p = 2$ .

It was already noticed in [2] that the practical DPG method admits two interpretations. The first one is based on the DPG ultraweak formulation with discontinuous test functions, the second one is based on the ultraweak formulation with *globally conforming test functions*,

$$(5) \quad \begin{cases} (u, p) \in (L^2(\Omega))^2 \times L^2(\Omega) \\ \underbrace{((u, p), A(v, q))}_{=:b((u,p),(v,q))} = (g, v) + (f, q) \\ \forall (v, q) \in H(\text{div}, \Omega) \times H^1(\Omega), q = -v_n \text{ on } \Gamma \end{cases}$$

where the *global optimal test functions* which now solve the global problem,

$$(6) \quad \begin{cases} v \in H(\text{div}, \Omega), q \in H^1(\Omega), q = -v_n \text{ on } \Gamma \\ (A(v, q), A(\delta v, \delta q)) + \alpha((v, q), (\delta v, \delta q)) = b((u, p), (\delta v, \delta q)) \\ \forall \delta v \in H(\text{div}, \Omega), \delta q \in H^1(\Omega), \delta q = -\delta v_n \text{ on } \Gamma, \end{cases}$$

are approximated with non-conforming (“weakly conforming”) Bubnov-Galerkin method where the global continuity of  $q$  and normal component  $v_n$  have been replaced with  $L^2$ -orthogonality of jumps to polynomial spaces used for the discretization of traces and fluxes,

$$(7) \quad \begin{aligned} \langle \hat{u}_n, q \rangle &= \sum_e \int_e \hat{u}_n[q] = 0 & \forall \hat{u}_n \\ \langle \hat{p}, v_n \rangle &= \sum_e \int_e \hat{p}[v_n] = 0 & \forall \hat{p}. \end{aligned}$$

Loosely speaking, if in the first interpretation, we first localize optimal test functions and then approximate them, in the second interpretation, we first approximate and then localize. We emphasize that we are speaking only about the interpretation of the method and not practical computations that are always done locally. In particular, the global interpretation explains why decreasing coefficient  $\alpha$  in the test norm produces better results. Setting  $\alpha = 0$  in (6), we obtain a non-conforming least squares method for the globally optimal test functions. Notice that in the limiting case  $\alpha = 0$ , the optimal test functions solve the adjoint

problem which, except for the sign change in the impedance boundary condition, is the very same problem we are trying to solve. One might say thus that working behind the scenes for the DPG method is a non-conforming least squares method. If course, if we were able to solve for the global optimal test functions exactly, the DPG method would reduce to  $L^2$ -projection.

But we are not. Restricting ourselves to the theoretical case  $\alpha = 0$  (in practice, we must use  $\alpha > 0$  to be able to localize the computation of test functions), a Strang's type reasoning leads to the estimate:

$$(8) \quad \|(u - u_h, p - p_h)\| \leq \left(1 + \frac{1}{\gamma_h}\right) \inf_{(w_h, r_h)} \|(u - w_h, p - r_h)\| + \frac{1}{\gamma_h} \sup_{(v_h, q_h)} \frac{|((u, p), A_h(v, q))|}{\|A_h(v_h, q_h)\|}$$

Here,  $\gamma_h$  is the discrete inf-sup constant resulting from the approximation of optimal test functions and an approximation of the exact inf-sup constant  $\gamma = 1$ . The first term represents the best approximation error, the second one a consistency error resulting from the weak enforcement of the interelement continuity. The best approximation error, measured in the  $L^2$  norm, is pollution free.

The challenge now is to estimate  $\gamma_h$  and, first of all, the consistency error. We hope to be able to demonstrate that the consistency error is of order  $\omega(\omega h)^r$  where the exponent  $r$  is higher than the polynomial order used for traces and fluxes. This would explain the higher order effect in the performance of the DPG method.

#### REFERENCES

- [1] J.M. Melenk, *On Generalized Finite Element Methods*, PhD thesis, University of Maryland, 1995.
- [2] L. Demkowicz, J. Gopalakrishnan and A. Niemi, *A Class of Discontinuous Petrov-Galerkin Methods. Part III: Adaptivity.*, Appl. Numer. Math., textbf62:4 (2012), 396–427.
- [3] J. Zitelli, I. Muga, L. Demkowicz, J. Gopalakrishnan, D. Pardo and V. Calo, *A Class of Discontinuous Petrov-Galerkin Methods. Part IV: Wave Propagation Problems*, J. Comp. Phys., **230** (2011), 2406–2432.
- [4] L. Demkowicz, J. Gopalakrishnan, I. Muga and J. Zitelli, *Wavenumber Explicit Analysis for a DPG Method for the Multidimensional Helmholtz Equation*, Comput. Methods Appl. Mech. Engrg., **213-216** (2012), 126–138.

### A posteriori error estimation for highly indefinite Helmholtz problems

WILLY DÖRFLER

(joint work with S. Sauter)

**One-dimensional Helmholtz equation** [1]. We consider the boundary value problem

$$\begin{aligned} L(\gamma)u &:= -u'' + \gamma u = f && \text{in } \Omega := (0, 1), \\ u &= 0 && \text{in } \{0, 1\} \end{aligned}$$

for  $u : \Omega \rightarrow \mathbb{R}$ , where  $f \in L^2(\Omega)$  and  $\gamma \in L^\infty(\Omega)$ , without a condition corresponding its sign. It is assumed that the problem in its weak form formulation

is well-posed in the norm  $\|v\|_{\mathcal{H}} := \|v'\|_{L^2(\Omega)} + \|\kappa_* v\|_{L^2(\Omega)}$ , with  $\kappa := \sqrt{|\gamma|}$  and  $\kappa_* := \max\{\kappa, \pi\}$ .

This problem is solved on the following approximation space: Choose a piecewise constant approximation  $\bar{\gamma}$  to  $\gamma$  with respect to the underlying mesh. The local basis is chosen to be the fundamental system of the operator  $L(\bar{\gamma})$ . This approximation space can be enhanced by the local “bubbles”  $L(\bar{\gamma})\Psi = 1$ . Such functions may be highly oscillatory for locally negative  $\gamma$  and can be defined only if  $\sqrt{-\gamma}h \neq \pi$  is valid,  $h$  the local cell width. The two resulting finite element spaces allow estimates of first and second order in  $h$ .

We also provide a posteriori error estimates that allow to compute the solution based on a posteriori controlled mesh refining techniques.

**Two-dimensional Helmholtz equation** [2]. Let  $D$  be a compact domain in  $\mathbb{R}^2$  with Lipschitz boundary (containing 0) and  $B_R$  be a large ball around zero. The Helmholtz problem on the complement  $D^c$  of  $D$  with Sommerfeld’s radiation condition is approximated by a Helmholtz problem on  $\Omega := B_R \setminus \bar{D}$  with an approximated boundary condition. The problem for  $u : \Omega \rightarrow \mathbb{R}$  reads

$$\begin{aligned} -\Delta u - k^2 u &= f && \text{in } \Omega, \\ u &= g && \text{on } \partial D, \\ \partial_n u &= T_k u && \text{on } \partial B_R. \end{aligned}$$

Here,  $f$  and  $g$  are given data functions,  $n$  is the exterior normal with respect to  $\Omega$  and  $k$  may be a spatially varying function that is however constant and larger 1 outside a ball  $B_r \subset B_R$ .  $T_k$  may be either  $u \mapsto iku$  or the Dirichlet-to-Neumann operator for the exterior domain  $\mathbb{R}^2 \setminus B_R$ .

It has been proved in [3] [4] that the weak formulation satisfies an inf-sup-condition and that optimal error estimates hold that only depend on a adjoint approximability constant. Analysing the solutions’s structure more closely, it was found that an  $hp$ -mesh that obeys  $kh/p < 1$  with the moderate dependence  $p \sim \log(k)$  leads to a uniform error estimate.

A result of the present paper is, that these conditions will be sufficient to prove that the residual a posteriori error estimator provides a uniform (in  $k$ ) upper bound for the error in the energy norm. Our analysis also allows variable  $k$ .

## REFERENCES

- [1] W. Dörfler. Robust discretisation and a posteriori control for strongly oscillating solutions of the Schrödinger equation. *Computational Methods in Applied Mathematics*, 11:418–440, 2011.
- [2] W. Dörfler and S. Sauter. A posteriori error estimation for highly indefinite Helmholtz problems. Submitted.
- [3] J. Melenk and S. Sauter. Convergence analysis for finite element discretizations of the Helmholtz equation with Dirichlet-to-Neumann boundary conditions. *Math. Comp.*, 79:1871–1914, 2010.
- [4] J. Melenk and S. Sauter. Wave-number explicit convergence analysis for Galerkin discretizations of the Helmholtz equation. *SIAM J. Numer. Anal.*, 49(3):1210–1243, 2011.

## Iterative Methods for Helmholtz and Maxwell Equations

MARTIN JAKOB GANDER

There is a certain confusion about which equation is really called the Helmholtz equation, since in the literature on meteorology and climate simulation, also the similar looking equation with the opposite sign on the zeroth order term is called Helmholtz equation, due to early publications using this terminology [2, 3]. Even standard textbooks have adopted this terminology, see for example [4] (sometimes also the eigenvalue problem is called the Helmholtz equation [5]). This summer during a conference, I was asked if maybe Helmholtz himself had already considered both equations, and so looked in the collected works of Helmholtz [6]. The contributions of Helmholtz to advancing science are vast, he worked on hydrodynamics, acoustics (physical and physiological), electrodynamics, galvanism (the contraction of muscles stimulated by electric current), optics (physical and physiological), and even psychology. In a beautiful paper about the understanding of organ pipes [7], see Figure 1, I then found *the Helmholtz equation*. Helmholtz describes in his paper the problem of the open end of the pipe, and using a domain decomposition approach, he connects the outer spherical solution to the inner one in the tube, in order to determine an appropriate boundary condition, a problem that had not been satisfactorily addressed before, as described at the beginning of the paper, see Figure 1.

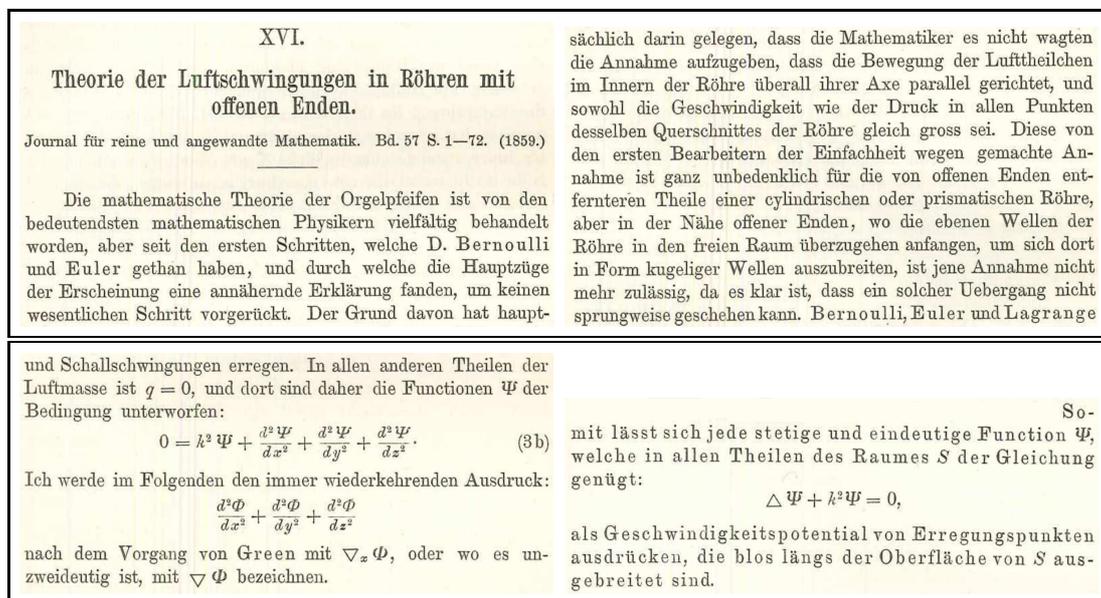


FIGURE 1. Copy of the beginning of the seminal publication of Helmholtz from [6], and an unusual shorthand notation for the Laplacian (the gradient symbol  $\nabla$ ), according to Helmholtz due to Green; only in one place later, Helmholtz uses the now common symbol  $\Delta$  for the Laplacian (shown on the right).

The numerical approximation of solutions of the Helmholtz equation poses two main difficulties: the first one is related to the approximation problem. Usually, in order to represent a signal accurately, about 10 points per wavelength are sufficient. This is also true for solutions of the Helmholtz equation, but unfortunately, when one discretizes the equation itself on a grid with about 10 points per wavelength, the solution one obtains can be very inaccurate, not because there are not enough points to accurately represent it, but because the discretized operator gives a solution with a substantial phase error. This is the so called pollution effect, see for example [8] and references therein.

The second fundamental difficulty is that iterative methods for the solution of linear systems have historically been derived for discretizations of diffusive problems, especially Laplace's equation, and all the intuition and analysis that went into the development of these methods used fundamental properties of the discretized Laplace equation. Unfortunately, all these intuitions are incorrect for the Helmholtz equation: there is no maximum principle, classical iterative methods are not smoothers for the Helmholtz equation, there is no minimization principle. In [1] one can find detailed explanations why Krylov methods, ILU preconditioners, multigrid and classical domain decomposition methods fail when used for the Helmholtz equation. Only specialized methods for the Helmholtz equation should be used, and in particular a new class of domain decomposition methods, called optimized Schwarz methods, is quite effective [9, 10]. The time harmonic Maxwell's equations present the same two difficulties as the Helmholtz equation, and optimized Schwarz methods have been developed for them, see e.g. [11].

#### REFERENCES

- [1] O.G. Ernst and M.J. Gander, *Why it is Difficult to Solve Helmholtz Problems with Classical Iterative Methods*, in Numerical Analysis of Multiscale Problems, I.G. Graham, Th.Y. Hou, O. Lakkis and R. Scheichl, Editors, Springer Verlag (2012), 325–363.
- [2] L. M. Leslie and B. J. McAveney, *Comparative test of direct and iterative methods for solving Helmholtz-type equations*, Mon. Wea. Rev. **101** (1973), 235–239.
- [3] T. E. Rosmond and F. D. Faulkner, *Direct solution of elliptic equations by block cyclic reduction and factorization*, Mon. Wea. Rev., **104** (1976), 641–649.
- [4] E. Zauderer, *Partial Differential Equations of Applied Mathematics*, John Wiley & Sons, second edition (1989).
- [5] L.C. Evans. *Partial Differential Equations*, American Mathematical Society, **19** (1998).
- [6] H. Helmholtz. *Wissenschaftliche Abhandlungen, Band 1-3*, Leipzig, Johann Ambrosius Barth (1882,1883,1895).
- [7] H. Helmholtz. *Theorie der Luftschwingungen in Röhren mit offenen Enden*, Journal für reine und angewandte Mathematik, **57** (1859), 1–72.
- [8] I. Babuska and S. Sauter. *Is the pollution effect of the FEM avoidable for the Helmholtz equation considering high wave numbers?*, SIAM J. Numer. Anal., **34**(6) (1997), 2392–2423.
- [9] M. J. Gander and F. Magoulès and F. Nataf. *Optimized Schwarz methods without overlap for the Helmholtz equation*, SIAM J. Sci. Comput., **24**(1) (2002), 38–60.
- [10] M. J. Gander and L. Halpern and F. Magoulès. *An Optimized Schwarz Method with Two-Sided Robin Transmission Conditions for the Helmholtz Equation*, Int. J. for Num. Meth. in Fluids, **55**(2) (2007), 163–175.
- [11] V. Dolean and L. Gerardo-Giorda and M. J. Gander. *Optimized Schwarz methods for Maxwell equations*, SIAM J. Scient. Comp., **31**(3) (2009), 2193–2213.

## On shifted Laplace and related preconditioners for finite element approximations of the Helmholtz equation

IVAN G. GRAHAM

(joint work with P. Childs, M. Gander, E. Spence and D. Shanks)

As a model problem for high-frequency wave scattering, we study the boundary value problem

$$(1) \quad \begin{cases} -(\Delta + k^2)u = f & \text{in } \Omega, \\ \frac{\partial u}{\partial n} - ik u = g & \text{on } \partial\Omega, \end{cases}$$

where  $\Omega$  is a bounded domain in  $\mathbb{R}^d$  with boundary  $\Gamma$ . Finite element approximations of this problem for high wavenumber  $k$  are notoriously hard to solve.

Although they are known to suffer from the pollution effect, low order finite element and finite difference approximations of this problem are still highly utilised in applications and the iterative solution of the resulting systems with a number of iterations which is independent (or close to being independent) of wave number in general situations remains a problem of great interest in both theory and in practice.

Quite a lot of recent research has focussed on preconditioning (1) using the discretization of the “shifted Laplace” problem

$$(2) \quad \begin{cases} -(\Delta + k^2 + i\epsilon)u = f & \text{in } \Omega, \\ \frac{\partial u}{\partial n} - i\mu(k, \epsilon)u = g & \text{on } \partial\Omega, \end{cases}$$

for some function  $\mu(k, \epsilon)$ . It is generally observed that if the “absorption” parameter  $\epsilon > 0$ , is taken large enough, the problem (2) becomes “easier” to solve, but if  $\epsilon$  is not taken too large then (2) is a good preconditioner for (1).

The use of absorption in preconditioning has been studied in various contexts by several authors. Let  $A_\epsilon$  denote the system matrix arising from the finite element approximation of (2). Then, for example, Erlangga, Vuik & Oosterlee [3] sought to precondition  $A_0$  with a multigrid approximation of  $A_\epsilon^{-1}$  and typically used  $\epsilon \sim k^2$ . Ernst and Gander [4] used Fourier analysis in 1D to show that  $\epsilon$  needs to be taken to be  $\mathcal{O}(k)$  for  $A_\epsilon$  to be a good preconditioner for  $A_0$  and needs to be taken to be  $\mathcal{O}(k^2)$  for multigrid to have a convergence factor less than unity. However the model problem considered in [4] was a very simplified one. Engquist and Ying [5] essentially used  $\epsilon = \mathcal{O}(k)$  to enhance the performance of their sweeping preconditioner. However none of these references give rigorous information on how  $\epsilon$  should be chosen in general to obtain the best performance for preconditioning.

Since the corresponding system matrices are complex and non-Hermitian, general purpose iterative solvers such as GMRES or BiCGStab are required. The analysis of the performance of such solvers is in general hard, since the system matrices are often highly non-normal and so information about the spectrum is not generally enough to provide information on the number of iterations. Thus condition number estimates are of limited benefit. In this work we use GMRES and we analyse its convergence using the field of values theory [1].

Using the classical Morawetz multiplier theory from PDE analysis (described in the review article [2]), we estimate the norm of the solution of problem (2) in terms of the data, where the parameters  $k$  and  $\epsilon$  appear explicitly in the estimates. These estimates hold when  $\Omega$  is a star-shaped Lipschitz domain for small  $\epsilon$  and for general Lipschitz domains when  $\epsilon$  is large. The results also hold when  $\Omega$  is the complement of a star-shaped scatterer in a large ball, with a Dirichlet condition on the scattering surface and either an exact far field condition or a first order absorbing approximation on the surface of the ball. Such stability results for the non-discretized problem (2) can then be used to infer bounds on the spectral norm of  $A_\epsilon^{-1}$  which are explicit in  $k$  and  $\epsilon$  and these in turn provide information about the field of values of  $A_\epsilon^{-1}A_0$ , under the assumption that the finite element meshes are shape-regular. This, combined with the field of values theory of GMRES allows us to prove that the choice  $\epsilon/k$  sufficiently small ensures  $k$ -independent convergence for GMRES when  $A_0$  is preconditioned by  $A_\epsilon^{-1}$ .

In the talk we also presented an analysis of optimised Schwarz domain decomposition methods (see, e.g. [6]) for (2), proving estimates on the rate of convergence explicitly in terms of  $k$  and  $\epsilon$ . We also gave numerical illustrations of the solution of (1), preconditioned by approximations of (2), in 2D, for some constant and variable wavespeed problems.

#### REFERENCES

- [1] B. Beckermann, S. A. Goreinov, AND E. E. Tyrtshnikov, *Some remarks on the Elman estimate for GMRES*, SIAM J. Matrix Anal. Appl. **27** (2006), 772–778.
- [2] S. N. Chandler-Wilde, I. G. Graham, S. Langdon, E.A. Spence, *Numerical-asymptotic boundary integral methods in high-frequency scattering*, Acta Numerica **21** (2012).
- [3] Y.A. Erlangga, C. Vuik and C.W. Oosterlee *On a class of preconditioners for solving the Helmholtz equation* Applied Numerical Mathematics **50** (2004), 409–425.
- [4] O. G. Ernst and M. J. Gander, *Why it is difficult to solve Helmholtz problems with classical iterative methods*. In Numerical Analysis of Multiscale Problems, I.G. Graham, T.Y. Hou, O. Lakkis and R. Scheichl, editors, Proceedings of an LMS Durham Symposium 2010, LNCS **83**, Springer Verlag, 2012.
- [5] B. Engquist and L. Ying, *Fast Algorithms for High Frequency Wave Propagation*. In Numerical Analysis of Multiscale Problems, I.G. Graham, T.Y. Hou, O. Lakkis and R. Scheichl, editors, Proceedings of an LMS Durham Symposium 2010, LNCS **83**, Springer Verlag, 2012.
- [6] M. Gander, F. Magoulès and F. Nataf, *Optimized Schwarz methods without overlap for the Helmholtz equation*, SIAM J. Sci. Comp. **24** (2002), 38–60.

## Sparse Tensor Edge Elements

RALF HIPTMAIR

(joint work with C. Jerez-Hanckes and Ch. Schwab)

As a model problem we consider the variational formulation of the Maxwell cavity source problem [8, Ch. 5]: seek  $\mathbf{u} \in V := \mathbf{H}_0(\mathbf{curl}, D)$ ,  $D \subset \mathbb{R}^3$  bounded,

$$(1) \quad \underbrace{(\mathbf{curl} \mathbf{u}, \mathbf{curl} \mathbf{v})_{L^2(D)} - k^2 (\mathbf{u}, \mathbf{v})_{L^2(D)}}_{=: a(\mathbf{u}, \mathbf{v})} = (\mathbf{f}, \mathbf{v}) \quad \forall \mathbf{v} \in \mathbf{H}_0(\mathbf{curl}, D),$$

where the wave number  $k > 0$  is supposed to be different from a resonant frequency of  $D$ . The source function  $\mathbf{f}$  is “stochastic” in the sense that it belongs to  $L^2(\Omega, V')$  for a probability space  $(\Omega, \mathcal{A}, \mathbb{P})$ . Then also the solution  $\mathbf{u}$  becomes a  $V$ -valued square integrable random variable:  $\mathbf{u} \in L^2(\Omega, V)$ . Its second moment  $\mathcal{M}^2 \mathbf{u} = \mathbb{E}(\mathbf{u} \otimes \mathbf{u}) \in L^1(V \otimes V)$ , where  $\mathbb{E}$  denotes the expectation, can be obtained as the solution of

$$(2) \quad (\mathbf{A} \otimes \mathbf{A}) w^{(2)} = \mathcal{M}^2 \mathbf{f},$$

featuring the tensor product operator  $\mathbf{A} \otimes \mathbf{A} : V \otimes V \rightarrow V' \otimes V'$  based on the operator  $\mathbf{A} : V \rightarrow V'$  induced by the bilinear form from (1). Well-known results guarantee existence and uniqueness of solutions of this equation; see [13, Section 1] for a comprehensive exposition.

Knowledge of the second moment  $w^{(2)}$  yields key statistic quantities like the variance of the random solution  $\mathbf{u}$ . A possible approach is probabilistic methods like the Multilevel Monte-Carlo method, where the boundary value problem (1) is solved for many realizations of  $\mathbf{f}$  and statistical information is extracted from these samples [1, 7]. Yet, we focus on a deterministic direct approximation of the solution of (2).

A stable Ritz-Galerkin discretization of  $\mathbf{A}\mathbf{u} = \mathbf{f}$  by means of a finite dimensional trial space  $V_h \subset V$  immediately spawns a stable Ritz-Galerkin discretization of (2), when using the “full tensor product” trial and test space  $V_h^{(2)} := V_h \otimes V_h$ . Unfortunately,  $\dim V_h^{(2)} = (\dim V_h)^2$ , whereas the approximation power of  $\dim V_h^{(2)}$  is usually not better than that of  $V_h$ . This is the notorious “curse of dimensionality”.

Taking for granted smoothness of  $\mathcal{M}^2 \mathbf{u}$ , a remedy is offered by sparse tensor Galerkin discretization, using subspaces  $\widehat{V}_h^{(2)}$  of  $V_h^{(2)}$  with approximation power almost like that of  $V_h$ , but dimensions substantially reduced to  $\dim \widehat{V}_h^{(2)} \approx \dim V_h$ , see [13, Section 1.4], [14, 15, 12, 11], and [6] for an introduction to so-called sparse grids.

However, the stability of sparse tensor Galerkin discretizations can no longer be inferred from that for  $V_h$  applied to  $\mathbf{A}$ , unless  $\mathbf{A}$  is positive. Non-positive operators are invariably encountered in wave propagation phenomena in frequency domain, and for them stability of the sparse tensor Galerkin discretization has to be established directly. This was done for boundary value problems for the Helmholtz equation  $-\Delta u - k^2 u = f$  in [16], see also [13, Sect. 1.4]. In [9] we have tackled the

issue for the Maxwell cavity source problem (1) and its discretization by means of edge elements.

We start from a shape-regular sequence of nested tetrahedral triangulations of  $D$ :  $\mathcal{T}_0 \prec \mathcal{T}_1 \prec \dots \prec \mathcal{T}_l \prec \dots$ , as created by successive global regular refinement of  $\mathcal{T}_0$ . We write  $V_l \subset \mathbf{H}_0(\mathbf{curl}, D)$  for the edge element space on  $\mathcal{T}_l$ . Fixing a *base resolution*  $L_0 \in \mathbb{N}_0$  and a maximal resolution  $L > L_0$ , we introduce *sparse tensor edge element spaces*, cf. [16, Def. 5.1] and [13, Def. 1.17], [9, Section 4], [3, Sect. 6.4]

$$(3) \quad \widehat{V}_{L,L_0} := \sum_{(l,k) \in \mathcal{S}_{L,L_0}} V_l \otimes V_k ,$$

$$\mathcal{S}_{L,L_0} := \{(l,k) \in \{0, \dots, L\}^2, l+k \leq L+L_0\}, \quad 0 \leq L_0 \leq L ,$$

They yield an asymptotically optimal Galerkin finite element discretization of the second moment problem, if we can establish that is a threshold level  $L_0 \in \mathbb{N}$  and  $C > 0$  such that the following *inf-sup condition* holds, cf. [3, Section 4]

$$(4) \quad \sup_{\widehat{\mathbf{v}}^{(2)} \in \widehat{V}_{L,L_0}} \frac{|\langle (\mathbf{A} \otimes \mathbf{A}) \widehat{\mathbf{u}}^{(2)}, \widehat{\mathbf{v}}^{(2)} \rangle|}{\|\widehat{\mathbf{v}}^{(2)}\|_V} \geq C \|\widehat{\mathbf{u}}^{(2)}\|_V \quad \forall \widehat{\mathbf{u}}^{(2)} \in \widehat{V}_{L,L_0}, \quad \forall L \geq L_0 .$$

A key tool in its proof are uniformly stable projectors  $\widehat{\mathbf{F}}_{L,L_0}^{(2)} : V \otimes V \rightarrow \widehat{V}_{L,L_0}$  that satisfy special *commuting diagram properties*

$$(5) \quad (\mathbf{curl} \otimes \mathbf{curl}) \circ \widehat{\mathbf{F}}_{L,L_0}^{(2)} = \widehat{\mathbf{G}}_{L,L_0}^{(2)} \circ (\mathbf{curl} \otimes \mathbf{curl}) ,$$

$$(6) \quad (\mathbf{ld} \otimes \mathbf{curl}) \circ \widehat{\mathbf{F}}_{L,L_0}^{(2)} = \widehat{\mathbf{H}}_{L,L_0}^{(2)} \circ (\mathbf{ld} \otimes \mathbf{curl}) ,$$

$$(7) \quad (\mathbf{curl} \otimes \mathbf{ld}) \circ \widehat{\mathbf{F}}_{L,L_0}^{(2)} = \widehat{\mathbf{J}}_{L,L_0}^{(2)} \circ (\mathbf{curl} \otimes \mathbf{ld}) ,$$

with  $\widehat{\mathbf{G}}_{L,L_0}^{(2)}$ ,  $\widehat{\mathbf{H}}_{L,L_0}^{(2)}$ , and  $\widehat{\mathbf{J}}_{L,L_0}^{(2)}$  standing for other stable projectors onto  $(\mathbf{curl} \otimes \mathbf{curl})\widehat{\mathbf{F}}_{L,L_0}^{(2)}$ ,  $(\mathbf{ld} \otimes \mathbf{curl})\widehat{\mathbf{F}}_{L,L_0}^{(2)}$ , and  $(\mathbf{curl} \otimes \mathbf{ld})\widehat{\mathbf{F}}_{L,L_0}^{(2)}$ , respectively.

The construction of these projectors turned out to be challenging. The construction that works relies on D. Boffi's *Fortin projectors* [2]  $\mathbf{F}_l : V \rightarrow V_l$  that are uniformly stable w.r.t. to the  $\mathbf{H}(\mathbf{curl}, D)$ -norm, satisfy a commuting diagram property, and the absorption property  $\mathbf{F}_{l-1} \circ \mathbf{F}_l = \mathbf{F}_{l-1} = \mathbf{F}_l \circ \mathbf{F}_{l-1}$  for all  $l \in \mathbb{N}_0$ . Then we find that p

$$(8) \quad \widehat{\mathbf{F}}_{L,L_0}^{(2)} := \sum_{(l,k) \in \mathcal{S}_{L,L_0}} \Delta \mathbf{F}_l \otimes \Delta \mathbf{F}_k , \quad \Delta \mathbf{F}_l := \mathbf{F}_l - \mathbf{F}_{l-1}, \quad \Delta \mathbf{F}_0 := \mathbf{F}_0 .$$

is a projector that delivers suitable discrete candidate functions for (4), see [9, Section 5].

Along the same lines we can deal with  $k$ -fold tensor product operators

$$\mathbf{A}^{(k)} = \underbrace{\mathbf{A} \otimes \dots \otimes \mathbf{A}}_{k \text{ times}}, \quad k > 2 .$$

though a general treatment will be extremely tedious. For the Helmholtz operator this case of higher moments is discussed in [13, Sect. 1].

The ideas can also be extended to the second moment problem for the electric field integral equation (EFIE). In this case we work in the trace space  $V := H^{-\frac{1}{2}}(\operatorname{div}_\Gamma, \Gamma)$  [5, Sect. 2] on a closed orientable polyhedral surface  $\Gamma$  and deal with the non-positive sesqui-linear form, see [5, Sect. 7], and [10, 4],

$$a(\boldsymbol{\xi}, \boldsymbol{\eta}) = \int_{\Gamma} \int_{\Gamma} \frac{\exp(-ik|\mathbf{x} - \mathbf{y}|)}{4\pi|\mathbf{x} - \mathbf{y}|} \left( \boldsymbol{\xi}(\mathbf{x}) \overline{\boldsymbol{\eta}}(\mathbf{y}) - k^{-2} \operatorname{div}_\Gamma \boldsymbol{\xi}(\mathbf{x}) \operatorname{div}_\Gamma \overline{\boldsymbol{\eta}}(\mathbf{y}) \right) dS(\mathbf{y}) dS(\mathbf{x}), \quad \boldsymbol{\xi}, \boldsymbol{\eta} \in V,$$

which is discretized using surface edge elements (also known as Raviart-Thomas boundary elements or RWG elements) [5, Sect. 8]. Tensor product saddle point problems are discussed in [3].

#### REFERENCES

- [1] A. BARTH, C. SCHWAB, AND N. ZOLLINGER, *Multi-level Monte Carlo finite element method for elliptic PDEs with stochastic coefficients*, Numer. Math., 119 (2011), pp. 123–161.
- [2] D. BOFFI, *Fortin operator and discrete compactness for edge elements*, Numer. Math., 87 (2000), pp. 229–246.
- [3] F. BONIZZONI, F. NOBILE, AND A. BUFFA, *Moment equations for the mixed formulation of the hodge laplacian with stochastic data*, Technical Report 31.2012, EPFL-ARTICLE-181594, MATHICSE, EPFL Lausanne, Switzerland, 2012.
- [4] A. BUFFA AND S. CHRISTIANSEN, *The electric field integral equation on Lipschitz screens: Definition and numerical approximation*, Numer. Math., 94 (2002), pp. 229–267.
- [5] A. BUFFA AND R. HIPTMAIR, *Galerkin boundary element methods for electromagnetic scattering*, in Topics in Computational Wave Propagation. Direct and inverse Problems, M. Ainsworth, P. Davis, D. Duncan, P. Martin, and B. Rynne, eds., vol. 31 of Lecture Notes in Computational Science and Engineering, Springer, Berlin, 2003, pp. 83–124.
- [6] H.-J. BUNGARTZ AND M. GRIEBEL, *Sparse grids*, Acta Numerica, 13 (2004), pp. 147–269.
- [7] K. A. CLIFFE, M. B. GILES, R. SCHEICHL, AND A. L. TECKENTRUP, *Multilevel Monte Carlo methods and applications to elliptic PDEs with random coefficients*, Comput. Vis. Sci., 14 (2011), pp. 3–15.
- [8] R. HIPTMAIR, *Finite elements in computational electromagnetism*, Acta Numerica, 11 (2002), pp. 237–339.
- [9] R. HIPTMAIR, C. JEREZ-HANCKES, AND C. SCHWAB, *Sparse tensor edge elements*, Report 2012-34, SAM, ETH Zürich, Switzerland, 2012. Submitted to BIT.
- [10] R. HIPTMAIR AND C. SCHWAB, *Natural boundary element methods for the electric field integral equation on polyhedra*, SIAM J. Numer. Anal., 40 (2002), pp. 66–86.
- [11] F. NOBILE, R. TEMPONE, AND C. G. WEBSTER, *An anisotropic sparse grid stochastic collocation method for partial differential equations with random input data*, SIAM J. Numer. Anal., 46 (2008), pp. 2411–2442.
- [12] ———, *A sparse grid stochastic collocation method for partial differential equations with random input data*, SIAM J. Numer. Anal., 46 (2008), pp. 2309–2345.
- [13] C. SCHWAB AND C. J. GITTELSON, *Sparse tensor discretizations of high-dimensional parametric and stochastic PDEs*, Acta Numerica, 20 (2011), pp. 291–467.
- [14] C. SCHWAB AND R. TODOR, *Sparse finite elements for elliptic problems with stochastic loading*, Numer. Math., 95 (2003), pp. 707–734.
- [15] ———, *Sparse finite elements for stochastic elliptic problems—higher order moments*, Computing, 71 (2003), pp. 43–63.
- [16] T. VON PETERSDORFF AND C. SCHWAB, *Sparse finite element methods for operator equations with stochastic data*, Appl. Math., 51 (2006), pp. 145–180.

## Fourier continuation methods

MARK LYON

Fourier continuation present a viable and efficient alternative to traditional methods for the resolution of the Gibbs phenomenon. These methods maintain most of the advantages of traditional Fourier approximations and lead to spectral PDE solvers with advantageous properties.

Significant computational problems remain unsolved because the best-known algorithms are not yet efficient enough to obtain sufficiently accurate solutions. Often, when referring to the efficiency of a PDE solution algorithm, the term “points per wavelength” (PPW) is invoked to refer to the resolution of the numerical scheme. It is well known (e.g. [2, 4]), however, that many traditional PDE solvers require increasing numbers of PPW as the number of wavelengths in the problem increases. Thus, the computational cost and memory requirements exhibit super-linear growth with the scale of the problem.

In contrast, Fourier methods and the related Chebyshev methods have excellent properties and completely overcome the difficulties due to pollution error, requiring just a fixed number of points per wavelength. These methods, however, require special conditions rarely met in real-world problems. Fourier methods have traditionally required periodicity of the underlying function and Chebyshev methods are significantly limited by the geometry of the problem. Fourier continuation alleviate both the periodicity and geometric constraints of classical spectral methods.

Figure 1 demonstrates the use of a Fourier continuation (FC) technique (also termed Fourier extension) for overcoming the Gibbs’ phenomenon and allowing spectrally accurate approximation of non-periodic functions with Fourier series. These methods have been applied through new fast computational algorithms to the solution of many PDEs in two and three spatial dimensions. The resulting FC-AD solvers ([3, 5]) demonstrate that FC-AD techniques have inherited the pollution free property of Fourier techniques, namely that the required number of PPW does not go up as the size of the problem increases. Recent results with respect to these Fourier Continuations include an increased understanding of the resolution and stability of these techniques, application to non-linear PDEs including the Navier-Stokes equations, and efficient methods for parallelization (e.g. [1]). A recent algorithmic contribution allows for a fast and yet more accurate FC method, which further reduces the PPW requirement significantly (accurate results with just six PPW have been demonstrated). Continuing efforts to improve and build on these PDE solvers include the refinement of the implementations of the boundary conditions and optimal time-stepping for these techniques.

## REFERENCES

- [1] N. Albin and O. P. Bruno. A spectral FC solver for the compressible Navier-Stokes equations in general domains I: Explicit time-stepping. *J. Comput. Phys.*, 230(16):6248–6270, JUL 10 2011.

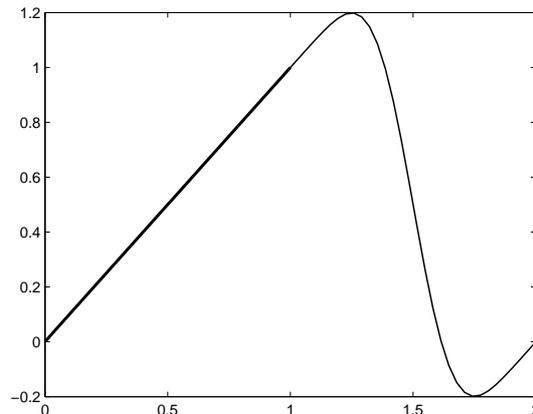


FIGURE 1. Fourier continuation of the function  $f(x) = x$ .

- [2] I.A. Babuska and S.A. Sauter. Is the pollution effect of the FEM avoidable for the Helmholtz equation considering high wavenumbers? *SIAM J. Numer. Anal.*, 34(6):2392–2423, 1997.
- [3] O. P. Bruno and M. Lyon. High-order unconditionally stable FC-AD solvers for general smooth domains I. Basic elements. *J. Comput. Phys.*, 229(6):2009–2033, MAR 20 2010.
- [4] L. Jameson. High order schemes for resolving waves: Number of points per wavelength. *J. Sci. Comput.*, 15(4):417–433, 2000.
- [5] M. Lyon and O. P. Bruno. High-order unconditionally stable FC-AD solvers for general smooth domains II. Elliptic, parabolic and hyperbolic PDEs; theoretical considerations. *J. Comput. Phys.*, 229(9):3358–3381, MAY 1 2010.

## **$\mathcal{H}$ -matrix approximability of the inverses of first kind BEM matrices**

JENS M. MELENK

(joint work with M. Faustmann, D. Praetorius)

The boundary element method (BEM) is based on discretizations of boundary integral operators and thus leads to fully populated matrices. Various compression schemes for these BEM matrices have been devised to store and/or realize the matrix-vector multiplication in log-linear complexity. Besides wavelet methods, several clustering-based techniques are available such as multipole expansions, [GR97], panel clustering [HN89], adaptive cross approximation (ACA, [Beb00]), and hybrid cross approximation (HCA, [BG05]). Many of these latter approaches rely on approximating the matrix by a blockwise low-rank matrix and can be understood as specific incarnations of the class of  $\mathcal{H}$ -matrices introduced in [Hac99, Gra01, Hac09]. In the context of the BEM (e.g., the approximation of the classical single layer, double layer, and hypersingular operator) the various approaches mentioned above exploit that exponential convergence in the block rank can be achieved if the block structure results from clustering algorithms that ensure an admissibility condition of the form (\*) given below. For the single layer operator  $V$ , we show that also the inverse of the corresponding BEM matrix  $\mathbf{V}$

can be approximated at an exponential rate in the block rank when using the same block structure as that employed to approximate  $\mathbf{V}$ . Full proofs are given in the forthcoming work [FMP13].

**Main results.** On the boundary  $\partial\Omega$  of a polygonal (for  $d = 2$ ) or polyhedral (for  $d = 3$ ) Lipschitz domains  $\Omega$ , we consider the single layer operator  $V$  associated with the Laplacian and its Galerkin discretization  $\mathbf{V}$  that arises from the trial space  $S^{0,0}(\mathcal{T}_h) = \text{span}\{\chi_i \mid i = 1, \dots, N\}$  of piecewise constant functions on a quasi-uniform mesh  $\mathcal{T}_h = \{T_i \mid i = 1, \dots, N\}$  with mesh size  $h$ . Clusters are subsets of the index set  $\mathcal{I} := \{1, \dots, N\}$ . A box  $B_R \subset \mathbb{R}^d$  of side length  $R$  is said to be a bounding box for a cluster  $\sigma$ , if  $\text{supp } \chi_i \subset B_R$  for all  $i \in \sigma$ . Two clusters  $\sigma, \tau \subset \mathcal{I}$  are said to be  $\eta$ -admissible, if there are two bounding boxes  $B_{R_\sigma}, B_{R_\tau}$  for the clusters  $\sigma, \tau$  such that

$$(*) \quad \eta \text{dist}(B_{R_\sigma}, B_{R_\tau}) > \min\{\text{diam } B_{R_\sigma}, \text{diam } B_{R_\tau}\};$$

this is a standard admissibility condition underlying many compression schemes for BEM matrices.

**Thm. 1:** Fix  $\eta > 0$  and  $q \in (0, 1)$ . Let the cluster pair  $(\sigma, \tau)$  be  $\eta$ -admissible. Then, for every  $k \in \mathbb{N}$  there are matrices  $\mathbf{X}_{\sigma\tau} \in \mathbb{R}^{|\sigma| \times r}$ ,  $\mathbf{Y}_{\tau\sigma} \in \mathbb{R}^{|\tau| \times r}$ , of rank  $r \leq C_{\dim} q^{-d} k^{d+1}$  with

$$\|\mathbf{V}^{-1}|_{\sigma \times \tau} - \mathbf{X}_{\sigma\tau} \mathbf{Y}_{\tau\sigma}^T\|_2 \leq Ch^{-(d+2)} q^k,$$

where the constants  $C, C_{\dim}$  are independent of  $h, \sigma, \tau, r$ , and  $k$ .

Thm. 1 yields a blockwise low-rank approximation of  $\mathbf{V}^{-1}$ . If the block partitioning of  $\mathbf{V}^{-1}$  has the structure of  $\mathcal{H}$ -matrices, then by arguments similar to those of [Gra01, Hac09, GH03, BH03] we can show:

**Thm. 2:** Fix  $\eta > 0$ . Let  $P$  be a partition of  $\mathcal{I} \times \mathcal{I}$  based on a cluster tree  $\mathbb{T}_{\mathcal{I}}$  as described in [GH03, Hac09] with sparsity constant  $C_{\text{sp}}$ , [Gra01, Hac09, GH03]. Then, for every  $r \in \mathbb{N}$  there is a blockwise rank  $r$  matrix  $\mathbf{W}_{\mathcal{H}}$  based on this partitioning  $P$  such that

$$\|\mathbf{V}^{-1} - \mathbf{W}_{\mathcal{H}}\|_2 \leq CC_{\text{sp}} N^{(d+2)/(d-1)} \text{depth}(\mathbb{T}_{\mathcal{I}}) e^{-br^{1/(d+1)}},$$

where the constants  $C, b$  are independent of  $N$  and  $r$ .

We mention that typical clustering strategies applied to quasi-uniform meshes with  $O(N)$  elements lead to fairly balanced cluster trees  $\mathbb{T}_{\mathcal{I}}$  with  $\text{depth}(\mathbb{T}_{\mathcal{I}}) = O(\log N)$  and feature a sparsity constant  $C_{\text{sp}}$  that is bounded uniformly in  $N$ .

**The key step.** Thm. 1 is based on the following Thm. 3. In order to formulate Thm. 3, we need to introduce some notation: For given  $f \in H^{1/2}(\Gamma)$  we let  $\phi_h \in S^{0,0}(\mathcal{T}_h)$  be defined by

$$(**) \quad (V\phi_h, v)_{L^2(\Gamma)} = (f, v)_{L^2(\Gamma)} \quad \forall v \in S^{0,0}(\mathcal{T}_h).$$

**Thm. 3:** Fix  $\eta > 0$  and  $q \in (0, 1)$ . Then, for each  $\eta$ -admissible cluster pair  $(\sigma, \tau)$  with bounding boxes  $B_{R_\sigma}, B_{R_\tau}$  the following is true. For each  $k \in \mathbb{N}$  there exists a space  $V_k \subset S^{0,0}(\mathcal{T}_h)$  with  $\dim V_k \leq C_{\dim} q^{-d} k^{d+1}$  such that for arbitrary

$f \in H^{1/2}(\Gamma)$  with  $\text{supp } f \subset B_{R_\tau} \cap \Gamma$  the corresponding solution  $\phi_h$  of (\*\*) satisfies

$$\min_{\psi_h \in V_k} \|\phi_h - \psi_h\|_{L^2(B_{R_\sigma} \cap \Gamma)} \leq Ch^{-2} q^k \|f\|_{L^2(\Gamma)}.$$

The constants  $C$ ,  $C_{\text{dim}}$  are independent of  $h$  and the clusters  $\sigma$ ,  $\tau$ .

**Extensions and outlook.** Applications of the above theorems include the ability to represent factorizations such as the Cholesky factorization and the LU-decomposition of  $\mathbf{V}$  in the  $\mathcal{H}$ -matrix format with exponential accuracy in the block rank. It is also possible to approximate  $\mathbf{V}^{-1}$  in the  $\mathcal{H}^2$ -matrix format with exponential accuracy in the block rank, if “min” is replaced with “max” in (\*). Further applications include the ability to represent discretizations of the Poincaré-Steklov operator with exponential accuracy in the block rank, which is relevant for the use of  $\mathcal{H}$ -techniques for FEM-BEM coupling.

Similar approximation results have previously been shown for discretizations of second order elliptic operators by the FEM in [BH03, Beb05a, Beb07, Sch06, Bör10a, FMP12]. However, the method of proof underlying Thm. 3 and its FEM counterpart in [FMP12] differs from that used in [BH03, Sch06, Bör10a] in that it works in a fully discrete setting directly instead of studying first solution operators on the continuous level and deduce approximation results on the discrete level by an additional projection argument. This difference is the reason for exponential convergence results in Thm. 3 and [FMP12] that are not limited in terms of the mesh size  $h$ . The method of proof used for Thm. 3 and in [FMP12] permits generalizations in several directions, which are currently under way: Discretizations by higher order elements, compressibility of the inverses of the (stabilized) hyper-singular operator in BEM and BEM operators on open surfaces; Neumann and mixed boundary conditions in FEM.

## REFERENCES

- [Beb00] Mario Bebendorf, *Approximation of boundary element matrices*, Numer. Math. **86** (2000), no. 4, 565–589. MR 1794343 (2001j:65022)
- [Beb05a] M. Bebendorf, *Efficient inversion of Galerkin matrices of general second-order elliptic differential operators with nonsmooth coefficients*, Math. Comp. **74** (2005), 1179–1199.
- [Beb05b] ———, *Hierarchical LU decomposition-based preconditioners for BEM*, Computing **74** (2005), no. 3, 225–247.
- [Beb07] ———, *Why finite element discretizations can be factored by triangular hierarchical matrices*, SIAM J. Numer. Anal. **45** (2007), no. 4, 1472–1494.
- [BH03] M. Bebendorf and W. Hackbusch, *Existence of  $\mathcal{H}$ -matrix approximants to the inverse FE-matrix of elliptic operators with  $L^\infty$ -coefficients*, Numer. Math. **95** (2003), no. 1, 1–28.
- [Bör10a] S. Börm, *Approximation of solution operators of elliptic partial differential equations by  $\mathcal{H}$ - and  $\mathcal{H}^2$ -matrices*, Numer. Math. **115** (2010), no. 2, 165–193.
- [BG05] Steffen Börm and Lars Grasedyck. Hybrid cross approximation of integral operators. *Numer. Math.*, 101(2):221–249, 2005.
- [FMP12] M. Faustmann, J. M. Melenk, and D. Praetorius, *A new proof for existence of  $\mathcal{H}$ -matrix approximants to the inverse of FEM matrices: the Dirichlet problem for the Laplacian*, ASC Report 51/2012, Institute for Analysis and Scientific Computing, Vienna University of Technology, Wien (2012).
- [FMP13] M. Faustmann, J. M. Melenk, and D. Praetorius, *Existence of  $\mathcal{H}$ -matrix approximants to the inverse of BEM matrices: the simple layer potential (in preparation)*.

- [GH03] L. Grasedyck and W. Hackbusch, *Construction and arithmetics of  $\mathcal{H}$ -matrices*, Computing **70** (2003), no. 4, 295–334.
- [GR97] L. Greengard and V. Rokhlin, *A new version of the fast multipole method for the Laplace in three dimensions*, Acta Numerica 1997, Cambridge University Press, 1997, pp. 229–269.
- [Gra01] L. Grasedyck, *Theorie und Anwendungen Hierarchischer Matrizen*, Ph.D. thesis, Universität ät Kiel, 2001.
- [Gra05] ———, *Adaptive recompression of  $\mathcal{H}$ -matrices for BEM*, Computing **74** (2005), no. 3, 205–223.
- [Hac99] W. Hackbusch, *A sparse matrix arithmetic based on  $\mathcal{H}$ -matrices. Introduction to  $\mathcal{H}$ -matrices*, Computing **62** (1999), no. 2, 89–108.
- [Hac09] ———, *Hierarchische Matrizen: Algorithmen und Analysis*, Springer, 2009.
- [HN89] W. Hackbusch and Z.P. Nowak, *On the fast matrix multiplication in the boundary element method by panel clustering*, Numer. Math. **54** (1989), 463–491.
- [Sch06] R. Schreittmiller, *Zur Approximation der Lösungen elliptischer Systeme partieller Differentialgleichungen mittels Finiter Elemente und  $\mathcal{H}$ -Matrizen*, Ph.D. thesis, Technische Universität München, 2006.

## Hardy space method for waveguides

LOTHAR NANNEN

(joint work with M. Halla, T. Hohage, J. Schöberl)

**Helmholtz equation:** We consider for a given positive frequency  $\omega > 0$  solutions  $u$  to the time-harmonic wave equation

$$(1) \quad -\Delta u(x, y) - \omega^2 u(x, y) = 0$$

on a simple domain  $\Omega = (\mathbb{R} \times D) \setminus K \subset \mathbb{R}^d$ .  $D \subset \mathbb{R}^{d-1}$  is a bounded Lipschitz-domain with outer normal  $\nu_D$  and  $K \subset (a, 0) \times D$  a compact scatterer with  $a < 0$  and  $\partial K \cap (\mathbb{R} \times \partial D) = \emptyset$ .

We assume sound hard boundary conditions  $\frac{\partial u}{\partial \nu_D} = 0$  on  $\mathbb{R} \times \partial D$ ,  $\frac{\partial u}{\partial \nu_K} = g_K$  on  $\partial K$  and a suitable radiation condition for  $|x| \rightarrow \infty$ . In order to solve this problem numerically by finite element methods, we split the domain into a bounded interior domain  $\Omega_{\text{int}} := ((a, 0) \times D) \setminus K$  and two unbounded exterior domains  $\Omega_{\text{ext}}^{\text{left}} := (-\infty, a) \times D$  and  $\Omega_{\text{ext}}^{\text{right}} := \mathbb{R}_+ \times D$ . While the interior problem can be treated with standard finite element methods, the exterior problems need particular attention. Therefore we consider in the following the right exterior problem

$$(2a) \quad -\Delta u - \omega^2 u = 0, \quad (x, y) \in \Omega_{\text{ext}}^{\text{right}},$$

$$(2b) \quad \frac{\partial u}{\partial \nu_D} = 0, \quad (x, y) \in \mathbb{R}_+ \times \partial D,$$

$$(2c) \quad u(0, \bullet) = g_{\text{in}} \quad y \in D,$$

$$(2d) \quad u \quad \text{is outgoing for } x \rightarrow \infty.$$

We choose a orthonormal basis of eigenfunctions  $(\varphi_n)_{n \in \mathbb{N}}$  to the negative, self-adjoint Neumann-Laplacian  $-\Delta : \mathcal{D}(-\Delta) \subset L^2(D) \rightarrow L^2(D)$  with eigenvalues

$\lambda_1 := 0 < \lambda_2 \leq \lambda_3 \leq \dots$ . By separation of variables, solutions  $u \in H_{\text{loc}}^1(\Omega_{\text{ext}}^{\text{right}})$  to problem (2) are given by

$$(3) \quad u(x, y) = \sum_{n=1}^{\infty} (c_n e^{i\kappa_n x} + d_n e^{-i\kappa_n x}) \varphi_n(y),$$

with phase velocities  $\kappa_n := \sqrt{\omega^2 - \lambda_n}$  for  $\omega^2 \geq \lambda_n$  and  $\kappa_n := i\sqrt{\lambda_n - \omega^2}$  for  $\omega^2 < \lambda_n$ . We assume in this paper  $\kappa_n \neq 0$ ,  $n \in \mathbb{N}$ .

Since  $e^{-i\kappa_n x} \rightarrow \infty$  for  $x \rightarrow \infty$  and  $\omega^2 < \lambda_n$ , a reasonable radiation condition requires  $d_n = 0$  for  $\omega^2 < \lambda_n$ . For the finitely many guided modes (i.e.  $\omega^2 > \lambda_n$ ) it follows by the limiting absorption principle, that for radiating solutions the group velocities  $\kappa'_n(\omega)$  have to be positive. In the acoustic problem (2) this is equivalent to positive phase velocities  $k_n$  and therefore  $d_n = 0$  for all  $n \in \mathbb{N}$ . This leads to the following radiation condition: A solution  $u$  to (2a) is called outgoing, if for each  $y \in D$  the Laplace transformed function

$$(4) \quad \hat{u}(s, y) := \int_0^{\infty} e^{-sx} u(x, y) dx, \quad \Re(s) > 0,$$

has a holomorphic extension to the domain  $\mathbb{C}_{\kappa_0} := \{s \in \mathbb{C} \mid \Im(s/\kappa_0) < 0\}$  with a fixed complex parameter  $\kappa_0$  with  $\Re(\kappa_0) > 0$  and  $\Im(\kappa_0) > 0$ . For the details of the so called pole condition for Helmholtz problems see e.g. [1].

We define the Hardy spaces  $H_{\kappa_0} \subset L^2(\kappa_0 \mathbb{R})$  with  $\kappa_0 \mathbb{R} := \{\kappa_0 s \mid s \in \mathbb{R}\}$  of functions, which are  $L^2$  boundary values of holomorphic functions  $v$  in  $\mathbb{C}_{\kappa_0}$  satisfying  $\sup_{\epsilon > 0} \int_{\mathbb{R}} |v(\kappa_0(s - \epsilon i))|^2 ds < \infty$  (see e.g. [2]). Then a reformulation of the pole condition is simply given by the condition  $\hat{u} \in H_{\kappa_0} \otimes L^2(D)$ .

A Galerkin method in this tensor product space leads to the Hardy space infinite element method, where the basis functions are tensor products of basis functions  $\psi_j$ ,  $j = -1, \dots, N$  in  $H_{\kappa_0}$  and standard finite element basis functions  $w_l$ ,  $l = 1, \dots, M$ , of  $L^2(D)$ . For the details of this method and the transformation of (2a) to this space see e.g. [3, 4]. Here, we present only the basis functions in  $H_{\kappa_0}$ :

$$(5) \quad \psi_{-1} := \frac{1}{s - i\kappa_0}, \quad \psi_j := \frac{2i\kappa_0}{(s - i\kappa_0)^2} \left( \frac{s + i\kappa_0}{s - i\kappa_0} \right)^j, \quad j = 0, \dots, N,$$

and the basic formula for calculating a mass integral

$$(6) \quad \int_0^{\infty} u(x)v(x)dx \xrightarrow{\text{Laplace}} -\frac{i}{2\pi} \int_{\kappa_0 \mathbb{R}} \psi_j(s)\psi_k(-s)ds, \quad j, k = -1, \dots, N.$$


**Problems exhibiting phase and group velocities of different signs:** E.g. in elastic waveguide problems, the signs of group and phase velocities of modes can be different. Therefore, the standard Hardy space infinite element method as well as the complex scaling/ perfectly matched layer method will lead to wrong solutions, since the radiation condition behind these methods depends only on the phase velocity. As a one-dimensional model problem containing these difficulties we consider

$$(7) \quad (-\partial_x^2 - \xi^2)^2 u = \omega^2$$

with a fixed parameter  $\xi > 0$ . (3) becomes for this problem

$$(8) \quad u(x) = \sum_{n=1}^4 c_n e^{i\kappa_n x}, \quad \kappa_n := \pm \sqrt{\pm \omega^2 + \xi^2}.$$

In the scheme on the right hand side the curves of  $i\kappa_n$  when  $\omega$  goes from 0 (i.e.  $\kappa_n \pm \xi$ ) to  $\infty$  are given. The dashed lines represent the unwanted wavenumbers  $\kappa_1$  and  $\kappa_3$  with negative group velocity  $\kappa'_n$ . Note, that a standard pole condition with the given assumptions on  $\kappa_0$  would enforce  $c_1 = c_2 = 0$  for the guided modes (i.e.  $\omega < \xi$ ), but  $c_1 = c_3 = 0$  is required. Again we assume in the following that  $\omega > 0$  and  $\omega \neq \xi$ .

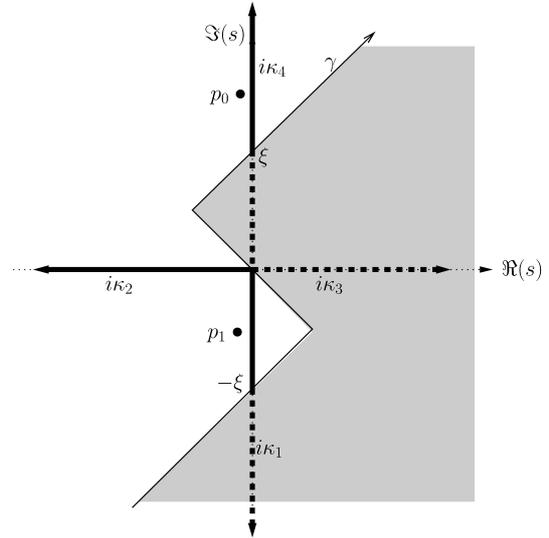

If we define the Hardy space  $H_\gamma$  analogously to  $H_{\kappa_0}$  as boundary values of holomorphic functions in the shaded domain of the scheme, the correct radiation condition is the following:  $u$  is outgoing, if the Laplace transformed function  $\hat{u} := \mathcal{L}u$  belongs to the Hardy space  $H_\gamma$ .

Instead of the integration over  $\kappa_0 \mathbb{R}$  in (6), this modification leads to an integration over  $\gamma$ . The basis (5) shows for the acoustic problem (2) super-algebraic convergence (see [4, 5]), but it will not be useful for the one-dimensional model problem (7) due to the wrong radiation condition for  $\omega < \xi$ . For this problem, it turned out that the following basis with complex poles  $p_0$  and  $p_1$  (see the scheme for the location) shows exponential convergence for arbitrary  $\omega > 0$  (see [6])

$$(9) \quad \begin{aligned} \psi_{-1}^{p_0}(s) &:= \frac{1}{s - p_0}, \\ \psi_j^{p_0, p_1}(s) &:= \frac{2p_0}{(s - p_0)^2} \left( \frac{|p_0|}{\max(|p_0|, |p_1|)} \frac{s + p_1}{s - p_0} \right)^j, \quad j = 0, \dots, N, \\ \psi_j^{p_1, p_0}(s) &:= \frac{2p_0}{(s - p_0)^2} \left( \frac{|p_1|}{\max(|p_0|, |p_1|)} \frac{s + p_0}{s - p_1} \right)^j, \quad j = 0, \dots, N. \end{aligned}$$

Unfortunately, using this basis the condition number of the system matrix grows fast for  $N \rightarrow \infty$  and is sensitive to the choice of the poles  $p_0$  and  $p_1$ .

The biggest advantage of the method is, that the modes of the waveguide are only needed for the theory. The radiation condition and the method itself is independent of the frequency  $\omega$  and the wavenumbers  $\kappa_n$ . Therefore they are well suited for resonance problems, where the frequency  $\omega$  is sought. To the authors knowledge, all other numerical methods (e.g. mode matching methods) for waveguide problems with different signs of group and phase velocity need to solve the dispersion relation  $\kappa_n(\omega)$  and are therefore frequency dependent.

We gratefully acknowledge financial support from Deutsche Forschungsgemeinschaft (DFG) in programs HO 2551/5-1 and SCH0 1253/2-1.

## REFERENCES

- [1] T. Hohage, F. Schmidt, L. Zschiedrich, *Solving time-harmonic scattering problems based on the pole condition. I. Theory*, SIAM J. Math. Anal., **35** (2003), 183–210.
- [2] P. L. Duren, *Theory of  $H^p$  spaces*, Pure and Applied Mathematics, Vol. 38, Academic Press, New York, 1970.
- [3] T. Hohage, L. Nannen, *Hardy space infinite elements for scattering and resonance problems*, SIAM J. Numer. Anal., **47** (2009), 972–996.
- [4] L. Nannen, A. Schädle, *Hardy space infinite elements for Helmholtz-type problems with unbounded inhomogeneities*, Wave Motion, **48** (2010), 116–129.
- [5] A. Lecke, *Hardyraum Infinite Elemente im Halbstreifen und Kopplung mit Innenraumproblemen*, diploma thesis at University of Göttingen (2012).
- [6] M. Halla, *Modeling and numerical simulation of wave propagation in elastic waveguides*, diploma thesis at Vienna University of Technology (2012).

## Generalized Convolution Quadrature for Hyperbolic Integral Equation

STEFAN A. SAUTER

(joint work with M. Lopez-Fernandez)

**Model Problem.** In this extended abstract, we will present the Generalized Convolution Quadrature (GCQ) (see [5]) for solving linear convolution equations of the form

$$(1) \quad k * \phi = g,$$

where  $*$  denotes convolution with respect to time,  $g$  is a given function, and  $k$  is some fixed kernel function/operator. We consider as our model problem the numerical solution of the wave equation in an unbounded exterior domain  $\Omega^+ := \mathbb{R} \setminus \overline{\Omega^-}$  for some bounded Lipschitz domain  $\Omega^- \subset \mathbb{R}^3$  with boundary  $\Gamma := \partial\Omega^-$

$$\partial_{tt}u = \Delta u \quad \text{in } \Omega^+ \times (0, T),$$

with Dirichlet boundary conditions  $u = g$  on  $\Gamma \times (0, T)$  and initial conditions  $u(0) = \partial_t u(0) = 0$  in  $\Omega^+$ .

We employ the single layer potential ansatz  $u = \mathcal{K}(\partial_t)\phi$  in  $(0, T) \times H^1(\Omega^+)$ , where, for  $\zeta \in \mathbb{C}_{\sigma_0} := \{z \in \mathbb{C} \mid \operatorname{Re} z > \sigma_0\}$  for some  $\sigma_0 > 0$ , we first define the frequency dependent integral operator

$$\mathcal{K}_{-\rho}(\zeta)\phi = \int_{\Gamma} \frac{e^{-\zeta\|\cdot-y\|}}{4\pi\zeta^\rho\|\cdot-y\|} \phi(y) d\Gamma_y$$

and via the inverse Laplace transform  $\mathcal{L}^{-1}$  the operator  $\mathcal{K}(\partial_t)\phi = \mathcal{L}^{-1}(\mathcal{K})\star\phi$ . This operator satisfies the wave equation and the initial conditions. The unknown density  $\phi : (0, T) \rightarrow H^{-1/2}(\Gamma)$  is determined via the Dirichlet boundary conditions

$$\mathcal{K}(\partial_t)\phi(t) = g(t) \quad \text{in } H^{1/2}(\Gamma) \quad \forall t \in (0, T).$$

The solution of the wave equation then is given by  $u(t, x) = (\mathcal{K}(\partial_t)\phi)(t, x)$  for all  $t \in (0, T)$  and all  $x \in \Omega^+$ .

**Discretization by Generalized Convolution Quadrature.** Convolution quadrature has been introduced in [6, 7] for parabolic problems and [8] for hyperbolic ones. The derivation of the method and the error analysis require uniform time stepping and the goal of the *generalized convolution quadrature (GCQ)* is to generalize this approach for non-uniform and adaptive time stepping.<sup>1</sup>

The convolution equation can be rewritten (see, e.g., [1, formulae before (6)]) as a system of integro-differential equations for the density  $\phi$  and an auxiliary function  $U : \mathbb{C}_{\sigma_0} \times [0, T]$

$$(2) \quad \begin{bmatrix} -I & \partial_t - \zeta \\ 0 & \mathcal{W}_\rho \end{bmatrix} \begin{pmatrix} \phi \\ U \end{pmatrix} = \begin{pmatrix} 0 \\ \partial_t^\rho g \end{pmatrix}$$

with  $\mathcal{W}_\rho U := \frac{1}{2\pi i} \int_{\mathcal{C}} \zeta^\rho \mathcal{K}(\zeta) U(\zeta, \cdot) d\zeta$  and  $\rho \in \mathbb{N}$  is a regularization parameter (see [5]).

In the section below, we will present a contour quadrature for the approximation of  $\mathcal{W}_\rho U$  which is of the form  $\int_{\mathcal{C}} f(\zeta) d\zeta \approx \sum_{k=1}^{N_Q} \omega_k f(\zeta_k)$  for some weights/nodes  $\omega_k$ ,  $\zeta_k$ . As a consequence we need the values of  $U$  not at all points  $\zeta \in \mathcal{C}$  but only at the quadrature points  $\zeta_k$  and we set  $U_k := U(\zeta_k, \cdot)$ .

For the time discretization of the first equation in (2) we introduce time points  $0 = t_0 < t_1 < \dots$  and denote the time steps by  $\Delta_n := t_n - t_{n-1}$ ,  $n \geq 1$ . We employ the implicit Euler method and obtain the recursive approximation for the first equation  $U^{(0)} = 0$  and  $U^{(n)}(\zeta) = \frac{1}{1 - \zeta \Delta_n} U^{(n-1)}(\zeta) + \frac{\Delta_n}{1 - \zeta \Delta_n} \phi^{(n)}$ . For the spatial discretization we employ a boundary element method [9] and denote by  $h$  the mesh width of the spatial discretization. The GCQ algorithm with contour quadrature starts with the initialization steps: a) Generate boundary element approximations  $\mathcal{K}_{h,k}$  of the operators  $\mathcal{K}_k = \mathcal{K}(\zeta_k)$  for all  $1 \leq k \leq N_Q$ ;

b) set  $\left( U_{h,k}^{(0)} \right)_{k=1}^{N_Q} = \mathbf{0}$ ; c) solve  $\mathcal{K}_h \left( \frac{1}{\Delta_1} \right) \phi_h^{(1)} = (\partial_t^\rho g)_h^{(1)}$ . For the recursion  $n = 1, 2, \dots, N$ , we assume that  $\phi_h^{(n)}$  and  $\left( U_{h,k}^{(n-1)} \right)_{k=1}^{N_Q}$  are computed. Then, a) an

Euler step is performed:  $U_{h,k}^{(n)} = \frac{1}{1 - \zeta_k \Delta_n} U_{h,k}^{(n-1)} + \frac{\Delta_n}{1 - \zeta_k \Delta_n} \phi_h^{(n)} \quad \forall 1 \leq k \leq N_Q$ ;

b) the system  $\mathcal{K}_h \left( \frac{1}{\Delta_{n+1}} \right)$  and right-hand side  $R_h^{(n+1)} := g_h^{(n+1)} - \sum_{k=1}^{N_Q} \omega_k \frac{\mathcal{K}_{h,k} U_{h,k}^{(n)}}{1 - \Delta_{n+1} \zeta_k}$

are generated; c) the system  $\mathcal{K}_h \left( \frac{1}{\Delta_{n+1}} \right) \phi_h^{(n+1)} = R_h^{(n+1)}$  is solved.

<sup>1</sup>Recently, variable time meshes for space-time Galerkin discretization of retarded potential integral equations have been introduced in [10].

This approach (Laplace transform/integrator for ODE/contour quadrature) allows to use *variable time stepping* (Generalized Convolution Quadrature GCQ) and avoids to store and integrate over the full history.

**Contour Quadrature.** To approximate the operator  $\mathcal{W}_{\rho,h}U^{(n)}$  we fix the contour  $\mathcal{C}$  to be the circle in  $\mathbb{C}$  about  $\Delta_{\min}^{-1}$  with radius  $\Delta_{\min}^{-1}$  and propose a parametrization by the composition  $\gamma = z \circ u$  of a Möbius transform with the Jacobi elliptic function  $\operatorname{sn}(\cdot | \lambda)$

$$z(u) := \frac{\Delta_{\min}^{-1}}{q-1} \left( \sqrt{2q-1} \frac{\lambda^{-1/2} + u}{\lambda^{-1/2} - u} - 1 \right), \quad u(\sigma) := \operatorname{sn}(\sigma | \lambda), \quad \sigma \in J_\lambda,$$

where the parameter  $\lambda^2 := \frac{q - \sqrt{2q-1}}{q + \sqrt{2q-1}}$  depends on the ratio  $q := \Delta_{\max}/\Delta_{\min}$  of the maximal and minimal mesh width. This transformation has been introduced in [2] and has been analyzed in [3] for the class of contour integrals which contains the integrand in  $\mathcal{W}_{\rho,h}$ .

The error analysis in [5], [3], and [4] implies the following theorem for the convergence of the fully discrete GCQ.

**Theorem.** *Let  $\rho = 3$  and assume that  $1 - \Delta_{\max}\sigma_0 > 0$ . We further assume that  $g \in C^{\rho+3}([0, T])$  and  $g^{(\ell)}(0) = 0$  for all  $0 \leq \ell \leq \rho + 2$ . Let the grading of the time mesh be at most quadratically<sup>2</sup>, i.e.,  $\Delta_{\min} \geq c\Delta_{\max}^2$ . We assume for the number of contour quadrature points*

$$N_Q \geq CN \log^2 N.$$

Then, the GCQ algorithm generates an approximate solution  $\phi_h = \left(\phi_h^{(n)}\right)_{n=1}^N$  which satisfies

$$(3) \quad \max_{1 \leq n \leq N} \left\| (\phi(t_n))_{n=1}^N - \phi_h \right\|_{H^{-1/2}(\Gamma)} \leq \max_{1 \leq n \leq N} \|\phi - \phi_h\|_{H^{-1/2}(\Gamma)} + C_g e^{\delta_0 T} \Delta \left( \log \frac{1}{\Delta} \right),$$

where the constant  $C_g$  only depends on the right-hand side  $g$  and  $\delta_0 = O(1)$ .

**Remark.** In [5], it was proved that, for sufficiently smooth data and boundary elements of local polynomial order  $p$ , the first term in the right-hand side of (3) can be estimated from above by  $Ch^{p+3/2}$ .

Results of numerical experiments (cf. [4]) show that for Dirichlet data  $g(t)$  which are non-smooth at  $t = 0$ , quadratic grading of the time mesh can preserve optimal convergence rates  $O(\Delta)$  while uniform grading leads to suboptimal convergence rates  $O(\Delta^{1/2})$ .

---

<sup>2</sup>Generalizations to stronger mesh grading are considered in [4].

## REFERENCES

- [1] W. Hackbusch, W. Kress, and S. Sauter. Sparse convolution quadrature for time domain boundary integral formulations of the wave equation by cutoff and panel-clustering. In M. Schanz and O. Steinbach, editors, *Boundary Element Analysis: Mathematical Aspects and Applications*, volume 18, pages 113–134. Springer Lecture Notes in Applied and Computational Mechanics, 2006.
- [2] N. Hale, N. J. Higham, and L. N. Trefethen. Computing  $\mathbf{A}^\alpha$ ,  $\log(\mathbf{A})$ , and related matrix functions by contour integrals. *SIAM J. Numer. Anal.*, 46(5):2505–2523, 2008.
- [3] M. Lopez-Fernandez and S. A. Sauter. Fast and Stable Contour Integration for High Order Divided Differences via Elliptic Functions. Technical Report 08-2012, Institut für Mathematik, Univ. Zürich, 2012.
- [4] M. Lopez-Fernandez and S. A. Sauter. A Generalized Convolution Quadrature with Variable Time Stepping. Part II: Algorithms and Numerical Results. Technical Report 09-2012, Institut für Mathematik, Univ. Zürich, 2012.
- [5] M. Lopez-Fernandez and S. A. Sauter. A Generalized Convolution Quadrature with Variable Time Stepping. *IMA J. Numer. Anal.*, online first:doi:10.1093/imanum/drs034, 2013.
- [6] C. Lubich. Convolution quadrature and discretized operational calculus I. *Numer. Math.*, 52:129–145, 1988.
- [7] C. Lubich. Convolution quadrature and discretized operational calculus II. *Numer. Math.*, 52:413–425, 1988.
- [8] C. Lubich. On the multistep time discretization of linear initial-boundary value problems and their boundary integral equations. *Numer. Math.*, 67:365–389, 1994.
- [9] S. Sauter and C. Schwab. *Boundary Element Methods*. Springer, Heidelberg, 2010.
- [10] S. Sauter and A. Veit. A Galerkin Method for Retarded Boundary Integral Equations with Smooth and Compactly Supported Temporal Basis Functions. *Numer. Math.*, 123:145–176, 2013.

**Is the Helmholtz equation really sign indefinite?**

EUAN A. SPENCE

(joint work with A. Moiola)

**Introduction.** The usual variational (or weak) formulations of the Helmholtz equation are sign-indefinite in the sense that the sesquilinear forms cannot be bounded below by a positive multiple of the appropriate norm squared. This is often for a good reason, since in bounded domains under certain boundary conditions the solution of the Helmholtz equation is not unique at certain wavenumbers (those that correspond to eigenvalues of the Laplacian), and thus the variational problem cannot be sign-definite. However, even in cases where the solution is unique for all wavenumbers, the standard variational formulations of the Helmholtz equation are still indefinite when the wavenumber is large.

To illustrate this, consider the *interior impedance problem* for the Helmholtz equation. That is, given a bounded Lipschitz domain  $\Omega \subset \mathbb{R}^d$ ,  $f \in L^2(\Omega)$ ,  $g \in L^2(\partial\Omega)$ , and  $k > 0$ , find  $u$  such that

$$(1a) \quad \mathcal{L}u := \Delta u + k^2 u = -f \quad \text{in } \Omega,$$

$$(1b) \quad \frac{\partial u}{\partial n} - iku = g \quad \text{on } \partial\Omega.$$

This problem can be put in weak (or variational) form by multiplying by the complex conjugate of a test function  $v$  and integrating by parts, i.e. using Green's identity

$$(2) \quad \bar{v}\mathcal{L}u = \nabla \cdot [\bar{v}\nabla u] - \nabla u \cdot \bar{\nabla}v + k^2 u\bar{v}.$$

The result is that the boundary value problem (BVP) (1) can be reformulated as:

$$(3) \quad \text{Find } u \in \mathcal{V} \text{ such that } a(u, v) = F(v) \text{ for all } v \in \mathcal{V}.$$

with  $\mathcal{V}$  the Hilbert space  $H^1(\Omega)$  equipped with norm

$$\|v\|_{1,k,\Omega}^2 := \|\nabla v\|_{L^2(\Omega)}^2 + k^2 \|v\|_{L^2(\Omega)}^2,$$

the sesquilinear form  $a(\cdot, \cdot) : \mathcal{V} \times \mathcal{V} \rightarrow \mathbb{C}$  given by

$$(4) \quad a(u, v) := \int_{\Omega} (\nabla u \cdot \bar{\nabla}v - k^2 u\bar{v}) \, d\mathbf{x} - ik \int_{\partial\Omega} u\bar{v} \, ds,$$

and the antilinear functional  $F : \mathcal{V} \rightarrow \mathbb{C}$  given by

$$(5) \quad F(v) := \int_{\Omega} f\bar{v} \, d\mathbf{x} + \int_{\partial\Omega} g\bar{v} \, ds,$$

Given a variational problem of the form (3), ideally one would like to prove that there exist constants  $C_c, \alpha > 0$  such that

$$(6) \quad |a(u, v)| \leq C_c \|u\|_{\mathcal{V}} \|v\|_{\mathcal{V}} \text{ for all } u, v \in \mathcal{V}, \text{ (continuity),}$$

$$(7) \quad |a(v, v)| \geq \alpha \|u\|_{\mathcal{V}}^2 \text{ for all } v \in \mathcal{V}, \text{ (coercivity).}$$

“Sign-definite” is used as a synonym for “coercive” (thus a variational problem is sign-indefinite if and only if it is not coercive). Note that several authors call property (7) “ $\mathcal{V}$ -ellipticity” (see, e.g., [3, §2.4.1], [2, §1], [7, Equation 2.43]) and use the word “coercivity” for the weaker property of satisfying a Gårding inequality ([3, §2.4.3], [7, Definition 2.1.54]).

If continuity and coercivity can be established then there are three important consequences (i) existence and uniqueness of the solution to the variational problem (3) via the Lax–Milgram theorem, (ii) quasi-optimality of the Galerkin method applied to (3) for *any* finite dimensional subspace of  $\mathcal{V}$ , and (iii) sign-definiteness of the finite dimensional matrix of the Galerkin method.

Returning to the variational formulation of the interior impedance problem (4) and (5), one can show that if  $k^2 \geq \lambda_1$  (the smallest eigenvalue of the negative Laplacian with Dirichlet boundary conditions) then there exists a  $v \in H^1(\Omega)$  such that  $a(v, v) = 0$ ; thus  $a(\cdot, \cdot)$  is not coercive. This indefiniteness has implications for both the analysis and the practical implementation of finite element methods based on the variational formulation.

**A new sign-definite variational formulation of the interior impedance problem.** This talk introduced a new sign-definite formulation of the Helmholtz equation posed in the interior of a star-shaped domain with impedance boundary conditions. Like the standard variational formulation, this new formulation

arises just by multiplying the Helmholtz equation by a particular test function and integrating by parts.

Consider the Hilbert space

$$(8) \quad V := \left\{ v : v \in H^1(\Omega), \Delta v \in L^2(\Omega), \nabla v \in (L^2(\partial\Omega))^d \right\}$$

with norm

$$\|v\|_V^2 := k^2 \|v\|_{L^2(\Omega)}^2 + \|\nabla v\|_{L^2(\Omega)}^2 + k^{-2} \|\Delta v\|_{L^2(\Omega)}^2 + L \left( k^2 \|v\|_{L^2(\partial\Omega)}^2 + \|\nabla v\|_{L^2(\partial\Omega)}^2 \right),$$

and obvious inner product, where  $L$  is the diameter (or some other characteristic length scale) of the domain  $\Omega$ . Define the sesquilinear form  $b : V \times V \rightarrow \mathbb{C}$  by

$$\begin{aligned} b(u, v) := & \int_{\Omega} \left( \nabla u \cdot \overline{\nabla v} + k^2 u \bar{v} + \left( \mathcal{M}u + \frac{1}{3k^2} \mathcal{L}u \right) \overline{\mathcal{L}v} \right) dx \\ & - \int_{\partial\Omega} \left( iku \overline{\mathcal{M}v} + \left( \mathbf{x} \cdot \nabla_{\partial\Omega} u - ik\beta u + \frac{d-1}{2} u \right) \frac{\overline{\partial v}}{\partial n} \right. \\ & \left. + (\mathbf{x} \cdot \mathbf{n}) (k^2 u \bar{v} - \nabla_{\partial\Omega} u \cdot \overline{\nabla_{\partial\Omega} v}) \right) ds, \end{aligned}$$

and antilinear functional  $G : V \rightarrow \mathbb{C}$  by

$$G(v) := \int_{\Omega} \left( \overline{\mathcal{M}v} - \frac{1}{3k^2} \overline{\mathcal{L}v} \right) f dx + \int_{\partial\Omega} \overline{\mathcal{M}v} g ds,$$

where  $\beta$  is an arbitrary real constant,  $d$  is the spatial dimension,

$$\mathcal{L}u := \Delta u + k^2 u, \quad \mathcal{M}u := \mathbf{x} \cdot \nabla u - ik\beta u + \frac{d-1}{2} u,$$

and  $\nabla_{\partial\Omega}$  is the surface gradient on  $\partial\Omega$  (recall that  $\nabla_{\partial\Omega}$  is such that if  $u$  is differentiable in a neighbourhood of  $\partial\Omega$  then  $\nabla_{\partial\Omega} u = \nabla u - \mathbf{n} \frac{\partial u}{\partial n}$  on  $\partial\Omega$ ).

The sesquilinear form  $b(\cdot, \cdot)$  and functional  $G(\cdot)$  are defined in this way because if  $u$  is the solution to the BVP (1), then

$$(9) \quad b(u, v) = G(v) \quad \text{for all } v \in V;$$

(this is not immediately obvious, see [4, Proposition 3.2]).

Using the Cauchy–Schwarz inequality it is straightforward to show that the sesquilinear form  $b(\cdot, \cdot)$  is continuous on  $V$ . In particular, if  $\beta$  is independent of  $k$  (as we choose it to be below), then the continuity constant  $C_c \sim k$  as  $k \rightarrow \infty$ .

The main novelty of  $b(\cdot, \cdot)$  is that, for some domains, it is coercive on  $V$ :

**Theorem 1.** [4, Theorem 3.4] *Let  $\Omega$  be a Lipschitz domain with diameter  $L$  that is star-shaped with respect to a ball, i.e. there exists a  $\gamma > 0$  such that  $\mathbf{x} \cdot \mathbf{n}(\mathbf{x}) \geq \gamma L$  for all  $\mathbf{x} \in \partial\Omega$  such that  $\mathbf{n}(\mathbf{x})$  exists. If the arbitrary constant  $\beta$  is chosen such that  $\beta \geq \frac{L}{2} \left( 1 + \frac{4}{\gamma} + \frac{\gamma}{2} \right)$  then, for any  $k > 0$ ,*

$$\Re b(v, v) \geq \frac{\gamma}{4} \|v\|_V^2 \quad \text{for all } v \in V,$$

i.e.  $b(\cdot, \cdot)$  is coercive on  $V$  with constant  $\gamma/4$ .

**The idea behind the new formulation.** As we saw in above, the standard variational formulation of the interior impedance problem (1) is based on integrating over  $\Omega$  Green's identity for the Helmholtz equation (2).

The new variational formulation (9) comes from integrating the following identity over  $\Omega$

$$\overline{\mathcal{M}v}\mathcal{L}u + \mathcal{M}u\overline{\mathcal{L}v} = \nabla \cdot [\overline{\mathcal{M}v}\nabla u + \mathcal{M}u\overline{\nabla v} + \mathbf{x}(k^2 u\overline{v} - \nabla u \cdot \overline{\nabla v})] - \nabla u \cdot \overline{\nabla v} - k^2 u\overline{v}.$$

where the multiplier  $\mathcal{M}$  is defined by  $\mathcal{M}v := \mathbf{x} \cdot \nabla v - ik\beta v + \frac{d-1}{2}v$ , and the real number  $\beta$  is chosen to ensure coercivity of the resulting sesquilinear form.

The idea of multiplying the Helmholtz operator,  $\mathcal{L}$ , by the multiplier  $\mathcal{M}$  goes back to Morawetz and Ludwig [6] and was then extensively used by Morawetz in her famous work on the wave equation [5]. (For more history on the use of this type of multiplier, see [1, §5.3].)

#### REFERENCES

- [1] S. N. CHANDLER-WILDE, I. G. GRAHAM, S. LANGDON, AND E. A. SPENCE, *Numerical-asymptotic boundary integral methods in high-frequency acoustic scattering*, Acta Numerica, 21 (2012), pp. 89–305.
- [2] P. G. CIARLET, *Basic error estimates for elliptic problems*, in Handbook of numerical analysis, Vol. II, Handb. Numer. Anal., II, North-Holland, Amsterdam, 1991, pp. 17–351.
- [3] F. IHLENBURG, *Finite element analysis of acoustic scattering*, vol. 132, Springer Verlag, 1998.
- [4] A. MOIOLA AND E. A. SPENCE, *Is the Helmholtz equation really sign-indefinite?*, preprint, (2012).
- [5] C. S. MORAWETZ, *Decay for solutions of the exterior problem for the wave equation*, Communications on Pure and Applied Mathematics, 28 (1975), pp. 229–264.
- [6] C. S. MORAWETZ AND D. LUDWIG, *An inequality for the reduced wave operator and the justification of geometrical optics*, Communications on Pure and Applied Mathematics, 21 (1968), pp. 187–203.
- [7] S. A. SAUTER AND C. SCHWAB, *Boundary Element Methods*, Springer-Verlag, Berlin, 2011.

### Robust operator estimates

CHRISTIAN WIENERS

(joint work with B. Wohlmuth)

We provide robust stability estimates for first order systems, which then lead to robust estimates for a discretization of least-squares type in operator depending norms. This result transfers the ideas in [DGMZ12] for the Helmholtz equation to the Maxwell problem.

**The general setting.** Let  $H$  be a Hilbert space with norm  $\|\cdot\|_H$ , let  $U \subset H$  be a dense subspace, and let  $L: U \rightarrow H$  be a closed linear operator so that  $U$  is a Hilbert space in the graph norm  $\|u\|_U = \sqrt{\|u\|_H^2 + \|Lu\|_H^2}$ . We provide stability estimates of the form  $\|u\|_H \leq C_L \|Lu\|_H$  for  $u \in U$ . This shows that  $L$  is injective; surjectivity can be show by a corresponding estimate for the adjoint problem.

*Maxwell's equations.* Let  $(0, T)$  be a time interval, and let the permeability  $\mu$  and permittivity  $\varepsilon$  be uniformly positive in  $L_\infty$ . Electro-magnetic waves are determined by the first-order system for the magnetic field  $\mathcal{H}$  and the electric field  $\mathcal{E}$

$$L(\mathcal{H}, \mathcal{E}) = (\partial_t \mathcal{H} + \mu^{-1} \nabla \times \mathcal{E}, \partial_t \mathcal{E} - \varepsilon^{-1} \nabla \times \mathcal{H})$$

defined on

$$U = \{(\mathcal{H}, \mathcal{E}) \in L_2((0, T), U_D) \cap H^1((0, T), L_2(\Omega, \mathbb{R}^3 \times \mathbb{R}^3)) : (\mathcal{H}(0), \mathcal{E}(0)) = 0 \text{ in } \Omega\}$$

with  $U_D = \{(h, e) \in U_0 : h \times n = 0 \text{ on } \partial\Omega_{\mathcal{H}} \text{ and } e \times n = 0 \text{ on } \partial\Omega_{\mathcal{E}}\}$  depending on the boundary decomposition  $\partial\Omega = \partial\Omega_{\mathcal{E}} \cup \partial\Omega_{\mathcal{H}}$  and the divergence constraint in  $U_0 = \{(h, e) \in H(\text{curl}, \Omega)^2 : (\mu h, \nabla \psi)_\Omega = (\varepsilon e, \nabla \psi)_\Omega = 0 \text{ for all } \psi \in C_0^\infty(\Omega)\}$ . Let  $H$  be the closure of  $U$  in  $L_2((0, T) \times \Omega, \mathbb{R}^3 \times \mathbb{R}^3)$  with the weighted norm

$$\|(\mathcal{H}, \mathcal{E})\|_H^2 = \int_0^T \left( (\mu \mathcal{H}(t), \mathcal{H}(t))_\Omega + (\varepsilon \mathcal{E}(t), \mathcal{E}(t))_\Omega \right) dt.$$

Then, we obtain the stability estimate  $\|(\mathcal{H}, \mathcal{E})\|_H \leq 2T \|L(\mathcal{H}, \mathcal{E})\|_H$ .

*The monochromatic Maxwell problem.* Now we consider special monochromatic solutions of Maxwell's equation of the form  $(\mathcal{H}, \mathcal{E})(x, t) = \exp(i\omega t)(h(x), e(x))$  for given frequency  $\omega$ ; this results into  $L(h, e) = (i\omega h + \mu^{-1} \nabla \times e, i\omega e - \varepsilon^{-1} \nabla \times h)$ . Here, we consider  $U_R = \{(h, e) \in U_0 : \langle n \times h, \phi \rangle = \langle n \times e, n \times \phi \rangle \text{ for all } \phi \in C^\infty(\partial\Omega)^3\}$ . Note that smooth functions with  $\nabla \cdot (\varepsilon e) = \nabla \cdot (\mu h) = 0$  in  $\Omega$  and Robin-type boundary condition  $n \times h - (n \times e) \times n = 0$  on  $\partial\Omega$  are dense in  $U_R$ . Here,  $H$  denotes the closure of  $U_R$  in  $L_2(\Omega, \mathbb{C}^3 \times \mathbb{C}^3)$  with  $\|(h, e)\|_H^2 = (h, \mu h)_\Omega + (e, \varepsilon e)_\Omega$ .

We consider stability for the case of constant permeability  $\mu > 0$  and permittivity  $\varepsilon > 0$  on domains with  $x \cdot n(x) \geq \alpha > 0$  for a.a.  $x \in \partial\Omega$  and  $|x| \leq R$  for  $x \in \Omega$ , see also [HMP11, Thm. 3.3] and [Moi11, Thm. 5.4.5]. Then, we obtain

$$\|(h, e)\|_H \leq \left( 2\sqrt{\varepsilon\mu}R + \frac{(\mu + \varepsilon)R^2}{\alpha} \right) \|L(h, e)\|_H.$$

This extends the result for the Helmholtz problem [Mel95, Prop. 8.1.4] to the Maxwell case.

**Application.** Based on a disjoint partitioning  $\bar{\Omega} = \bigcup_{\tau \in \mathcal{T}} \bar{\tau}$  into open subdomains  $\tau \subset \Omega$  and corresponding subspaces  $V_\tau$ , we consider a weak formulation

$$(Lu, v)_{H, \tau} = (u, L^*v)_{H, \tau} + \langle \gamma_\tau u, \gamma_\tau^* v \rangle,$$

in each subdomain  $\tau$ , where  $L^*$  is the adjoint operator and  $\gamma_\tau, \gamma_\tau^*$  and suitable trace mappings on  $\partial\tau$ . The solution  $u \in U$  of  $Lu = f$  is then characterized by

$$(1) \quad \sum_\tau \langle \gamma_\tau u, \gamma_\tau^* v \rangle = (f, v)_H, \quad v \in \text{kernel}(L^*).$$

Let  $\hat{u} = (\gamma_\tau u)$  be the solution trace on the skeleton  $\bigcup \partial\tau$ . This is approximated in  $\hat{U}_h = \text{span}\{\hat{u}_h^k\} \subset \prod \gamma_\tau(V_\tau)$  as follows: For suitable finite element spaces  $H_{\tau, h}$

and  $V_{\tau,h}$  in  $\tau$  and an inner product  $a_{\tau}(\cdot, \cdot)$  in  $V_{\tau}$  compute a test basis  $(v_{\tau,h}^k, u_{\tau,h}^k) \in V_{\tau,h} \times H_{\tau,h}$  with

$$\begin{aligned} a_{\tau}(v_{\tau,h}^k, v) + (u_{\tau,h}^k, L^*v)_{\tau} &= \langle \hat{u}_{\tau,h}^k, \gamma_{\tau}^* v \rangle, & v \in V_{\tau,h}, \\ (L^*v_{\tau,h}^k, u)_{\tau} &= 0, & u \in H_{\tau,h}. \end{aligned}$$

The Petrov-Galerkin solution  $\hat{u}_h = (\hat{u}_{\tau,h}) \in \hat{U}_h$  of (1) is defined by

$$\sum_{\tau} \langle \hat{u}_{\tau,h}, \gamma_{\tau}^* v_h^k \rangle = (f, v_h^k)_{\Omega}.$$

Provided a suitable inf-sup constant  $\beta > 0$  for the saddle point problems in  $\tau$ , a stable a priori bound in operator depending norms for this discretization exists depending only  $\beta$  and  $C_L$  [WW12].

#### REFERENCES

- [DGMZ12] L. Demkowicz, J. Gopalakrishnan, I. Muga, and J. Zitelli. Wavenumber explicit analysis for a DPG method for the multidimensional Helmholtz equation. *Computer Methods in Applied Mechanics and Engineering*, 213:126–138, 2012.
- [HMP11] R. Hiptmair, A. Moiola, and I. Perugia. Stability results for the time-harmonic Maxwell equations with impedance boundary conditions. *Math. Models Methods Appl. Sci.*, 21(11):2263–2287, 2011.
- [Mel95] J. M. Melenk. *On generalized finite element methods*. PhD thesis, University of Maryland, 1995.
- [Moi11] A. Moiola. *Trefftz-Discontinuous Galerkin Methods for Time-Harmonic Wave Problems*. PhD thesis, ETH Zürich, 2011.
- [WW12] C. Wieners and B. Wohlmuth. *Robust operator estimates and the application to substructuring methods for first-order systems*. In preparation.

## Participants

**Dr. Lehel Banjai**

Max-Planck-Institut für Mathematik  
in den Naturwissenschaften  
Inselstr. 22 - 26  
04103 Leipzig  
GERMANY

**Prof. Dr. Leszek F. Demkowicz**

Institute for Computational  
Engineering and Sciences (ICES)  
University of Texas at Austin  
1 University Station C  
Austin, TX 78712-1085  
UNITED STATES

**Prof. Dr. Willy Dörfler**

Institut für Angewandte und Numerische  
Mathematik 2  
Karlsruher Institut für Technologie KIT  
76128 Karlsruhe  
GERMANY

**Prof. Dr. Björn Engquist**

Department of Mathematics  
The University of Texas at Austin  
1 University Station C1200  
Austin, TX 78712-1082  
UNITED STATES

**Prof. Dr. Martin Gander**

Département de Mathématiques  
Université de Geneve  
Case Postale 64  
2-4 rue du Lievre  
1211 Geneve 4  
SWITZERLAND

**Prof. Dr. Jay Gopalakrishnan**

Department of Mathematical Sciences  
Portland State University  
P.O. Box 751  
Portland, OR 97207-0751  
UNITED STATES

**Prof. Dr. Ivan G. Graham**

Dept. of Mathematical Sciences  
University of Bath  
Claverton Down  
Bath BA2 7AY  
UNITED KINGDOM

**Prof. Dr. Ralf Hiptmair**

Seminar für Angewandte Mathematik  
ETH-Zentrum  
Rämistr. 101  
8092 Zürich  
SWITZERLAND

**Dr. Mark Lyon**

Department of Mathematics  
University of New Hampshire  
Durham, NH 03824  
UNITED STATES

**Prof. Dr. Jens Markus Melenk**

Institut für Analysis und  
Scientific Computing  
Technische Universität Wien  
Wiedner Hauptstr. 8 - 10  
1040 Wien  
AUSTRIA

**Prof. Dr. Peter Monk**

Department of Mathematical Sciences  
University of Delaware  
501 Ewing Hall  
Newark, DE 19716-2553  
UNITED STATES

**Dr. Lothar Nannen**

Institut für Analysis und  
Scientific Computing  
Technische Universität Wien  
Wiedner Hauptstr. 8 - 10  
1040 Wien  
AUSTRIA

**Prof. Dr. Stefan A. Sauter**

Institut für Mathematik  
Universität Zürich  
Winterthurerstr. 190  
8057 Zürich  
SWITZERLAND

**Prof. Dr. Joachim Schöberl**

Institut für Analysis und  
Scientific Computing  
Technische Universität Wien  
Wiedner Hauptstr. 8 - 10  
1040 Wien  
AUSTRIA

**Dr. Euan Spence**

Dept. of Mathematical Sciences  
University of Bath  
Claverton Down  
Bath BA2 7AY  
UNITED KINGDOM

**Prof. Dr. Christian Wieners**

Karlsruher Institut f. Technologie (KIT)  
Inst. f. Angew. & Numerische  
Mathematik  
Englerstr. 2  
76131 Karlsruhe  
GERMANY

**Prof. Dr. Barbara Wohlmuth**

Zentrum Mathematik  
TU München  
Boltzmannstr. 3  
85748 Garching b. München  
GERMANY